


Subject ▶ Change on handle, blade case, strain relief, etc.

For Models ▶ 2412N, 2414, 2414K (Portable Cut-off)
5103N, 5103NA, 5201N and 5201NA (Circular Saw)

Note ▶ This information does not apply to the following tools.
For U.S.A., Guam, Canada and Australia: 2412N, 2414 and 2414K
For New Zealand: 24 14 For U.S.A. , Guam and Canada: 5201NA

Description ▶ * The pitch between the screw holes for securing the strain relief will be changed from 15 mm (19/32") to 20 mm (25/32").
* For 2412N, 2414 and 2414K only
The pan head screws M4x18 will be replaced by tapping screws PT4x18.
For 5103N, 5103NA, 5201N and 5201NA only
The pan head screws M4x12 or M4x14 will be replaced by pan head screws M4x18.


For 2412N, 2414 and 2414K

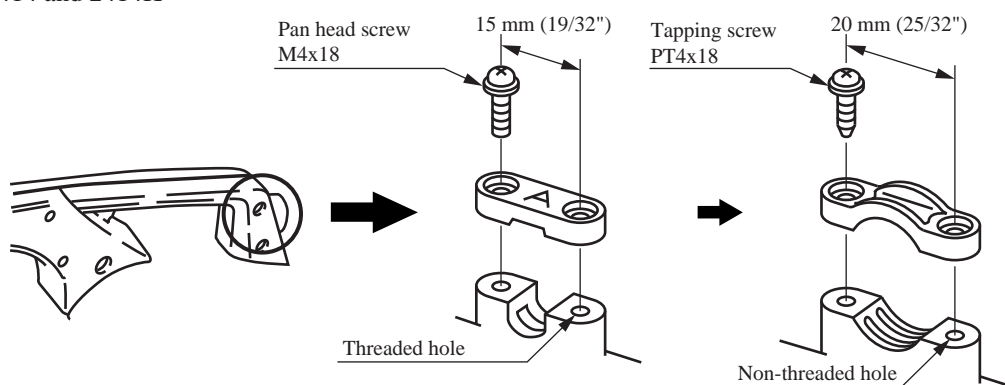

Note

The shape of strain relief is different depending upon the kind of power supply cord to be secured.

For 5103N, 5103NA, 5201N, and 5201NA

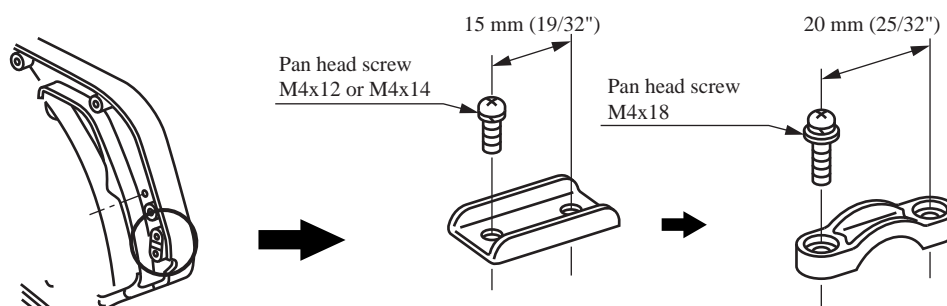

Note

The shape of strain relief is different depending upon the kind of power supply cord to be secured.

Interchangeability(I/C)

Current part		Q'ty	I/C	New part		Q'ty	Note
Handle set 181149-6		1	No	Handle set 182751-8		1	For 2412N, 2414 and 2414K W/ lock button hole See the note 1 below.
Handle set 181656-9		1	No	Handle set 182752-6		1	For 2412N, 2414 and 2414K W/o lock button hole See the note 1 below.
Pan head screw M4x18 911133-5		2	No	Tapping screw PT4x18 265995-6		2	For 2412N, 2414 and 2414K See the note 1 below.
Strain relief 687001-1		1	No	Strain reelief 687050-4		1	For 2412N, 2414 and 2414K For European countries, U.K. (220V), Malaysia, Kuwait, etc. See the note 1 below.
Strain relief 687001-1		1	No	Strain relief 687053-2		1	For 2412N, 2414 and 2414K For Saudi Arabia (220V)Turkey, Indonesia, China, etc. See the note 1 below.
Strain relief 687000-3		1	No	Strain relief 687054-0		1	For 2412N, 2414 and 2414K For U.K. (110V), South Africa, Bhutan,, etc. See the note 1 below.
Strain relief 687034-6		1	No	Strain relief 687054-0		1	For 2412N, 2414 and 2414K For Taiwan, Korea, Thailand, Philippines, Chile, Egypt, etc. See the note 1 below.
Blade case 316148-1		1	No	Blade case 316669-3		1	For 5103N See the note 2 below.
Blade case 316152-0		1	No	Blade case 316692-8		1	For 5103NA See the note 2 below.
Blade case 315744-2		1	No	Blade case 316697-8		1	For 5201N See the note 2 below.
Blade case 315745-0		1	No	Blade case 316744-5		1	For 5201NA See the note 2 below.
Strain relief 687600-9		1	No	Strain relief 687054-0		1	For 5103N, 5103NA, 5201N and 5201NA For Taiwan, Korea, Philippines, Thailand, etc. See the note 2 below.
Pan head screw M4x12 911116-5		2	No	Pan head screw M4x18 911133-5		2	For 5103N, 5103NA, 5201N and 5201NA For Taiwan, Korea, Philippines, Thailand, etc. See the note 2 below.
Strain relief 687001-1		1	No	Strain relief 687053-2		1	For 5103N, 5103NA, 5201N and 5201NA For Saudi Arabia (220V) Indonesia, China, etc. See the note 2 below.
Strain relief 687001-1		1	No	Strain relief 687052-4		1	For 5103N, 5103NA, 5201N and 5201NA For Malaysia, Kuwait, etc. See the note 2 below.
Pan head screw M4x14 911123-8		2	No	Pan head screw M4x18 911133-5		2	For 5103N, 5103NA, 5201N and 5201NA For Saudi Arabia (220V) Indonesia, China, Malaysia, Kuwait, etc. See the note 2 below.

Note

1. Re: Handle set, screw and strain relief for 2412N, 2414 and 2414K The current type parts and the new type parts are interchangeable as a set.
2. Re: Blade case, screw and strain relief for 5103N, 5103NA, 5201N and 5201NA
The current type parts and the new type parts are interchangeable as aset.

Implementation

2412N : From the next order
2414 : From serial No. 884144E
2414K : From the next order
5103N : From serial No. 33744E
5103NA: From the next order
5201N : From serial No. 48861E
5201NA: From the next order