


**Subject** ▶ Change on Motor Bracket Complete and Bearing Retainer

**For Models** ▶ 3612, 3612C (Router)

- Description** ▶
- 1) Change of Motor Bracket Complete
    - ; Bushes inlaid at Motor Bracket have been changed from steel to copper and lengthened. for smoothing up and down operation.
  - 2) Change of Bearing Retainer
    - ; Screws for fixing Bearing Retainer has been reduced from four to two.
    - Accordingly holes of Bearing Retainer for screws have been reduced from four to two.

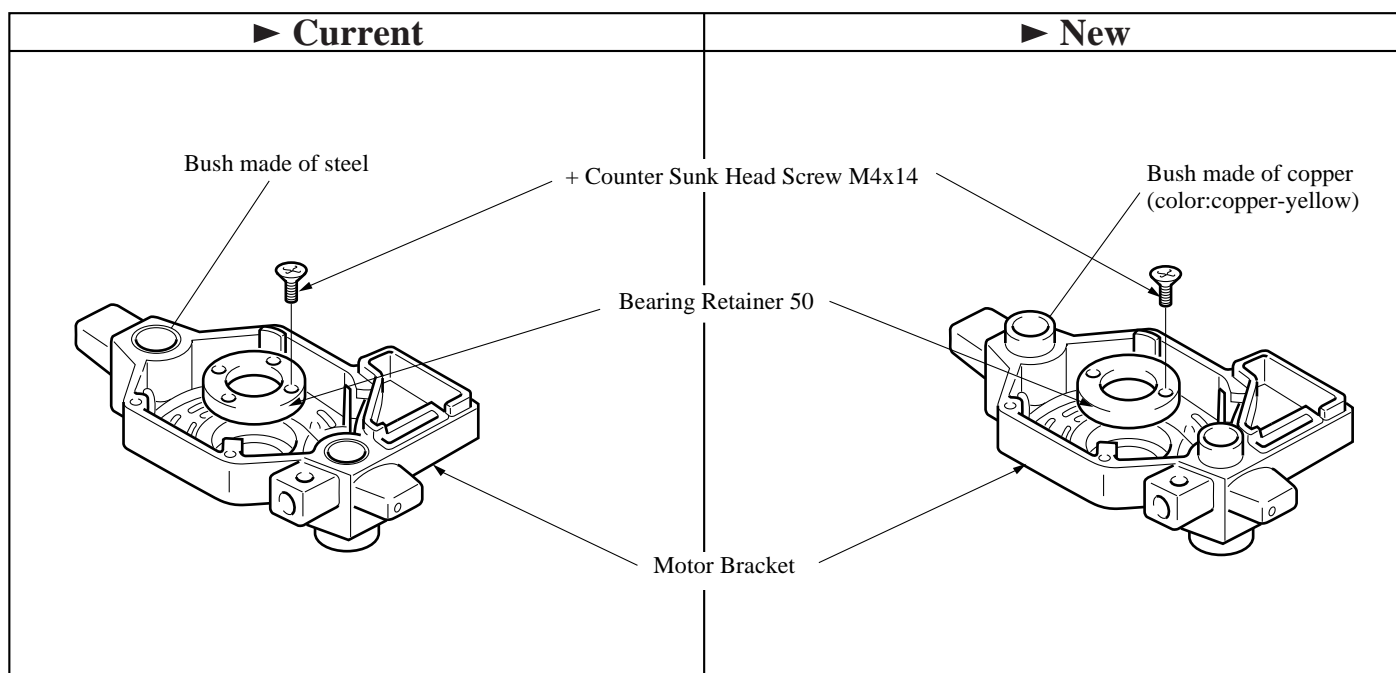

## Interchangeability(I/C)

Item No.	Current part		Q'ty	I/C	New part		Q'ty	Note
16	Motor Bracket Complete 150443-7		1	Yes	Motor Bracket Complete 152567-5		1	
13	Bearing Retainer 50 285657-0		1	Yes	Bearing Retainer 50 285657-0		1	
33	+ Counter Sunk Head Screw M4x14 251295-0		4	Yes	+ Counter Sunk Head Screw M4x14 251295-0		2	

## Implementation

3612 : From serial No.22483E(Feb. 1997)

3612C : From serial No. 16641E(Feb. 1997)