






**Subject** ▶ Change of Noise Suppressors, Line Coil, Wirings

**For Models** ▶ 1001, 1804N, 2012, 2416S, 2708, 3612B, 3800NA, 401, 5000SB, 5000SBR, 5008NB, 5500S, 6904, 6920N, 6928, BO6010, DA3000, JG1600, JN1600, JS1600, M242, M361, M431, M513, M801, M902, M903, M921, M923, M952

**Country** ▶ See Page 8 of 9


**Description** ▶ See below.

## 1) Change of Noise Suppressor


▶ Current	▶ New	Model
 <p>0.1uF+2x3000pF (645169-9)</p>	 <p>0.1uF+2x5000pF 645209-3</p>	<p>401, BO6010, DA3000, JG1600, JN1600, JS1600, M242, M431, M902, M903, M921, M923, M952</p> <p>5000SB (for New Zealand only)</p>
	 <p>0.22uF+2x2200pF 645261-1</p>	<p>1804N, 2012, 2416S, 3800NA, 5500S</p>
	 <p>0.22uF 645200-1</p>	<p>1001</p>
	 <p>0.1uF (645105-5)</p>	<p>2708, 3612B, 5000SBR, 5008NB, 6904, 6920N, 6928, M361, M513, M801</p> <p>5000SB (for Italy only)</p>

**2) Change of Line Coil: for 1804N only**


The wiring remains unchanged.

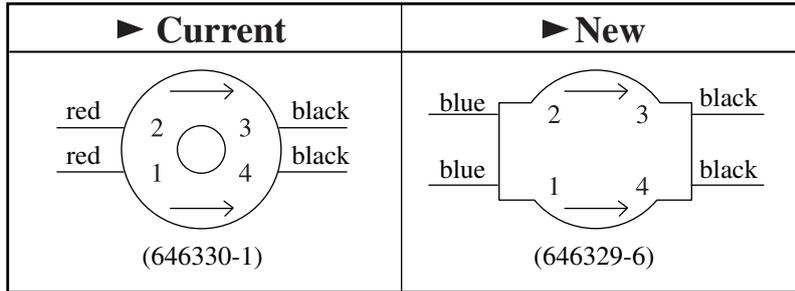

Install the Line Coil in the correct direction as illustrated below so that Lead Wires can't protrude from the space.

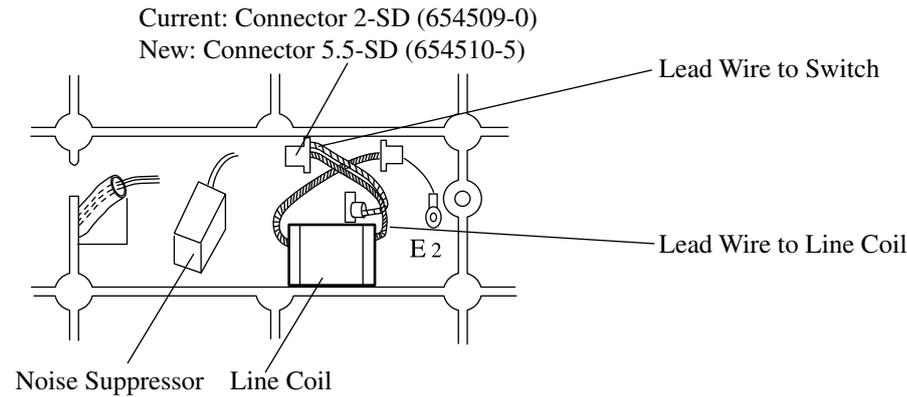


**3) Change of Wiring**

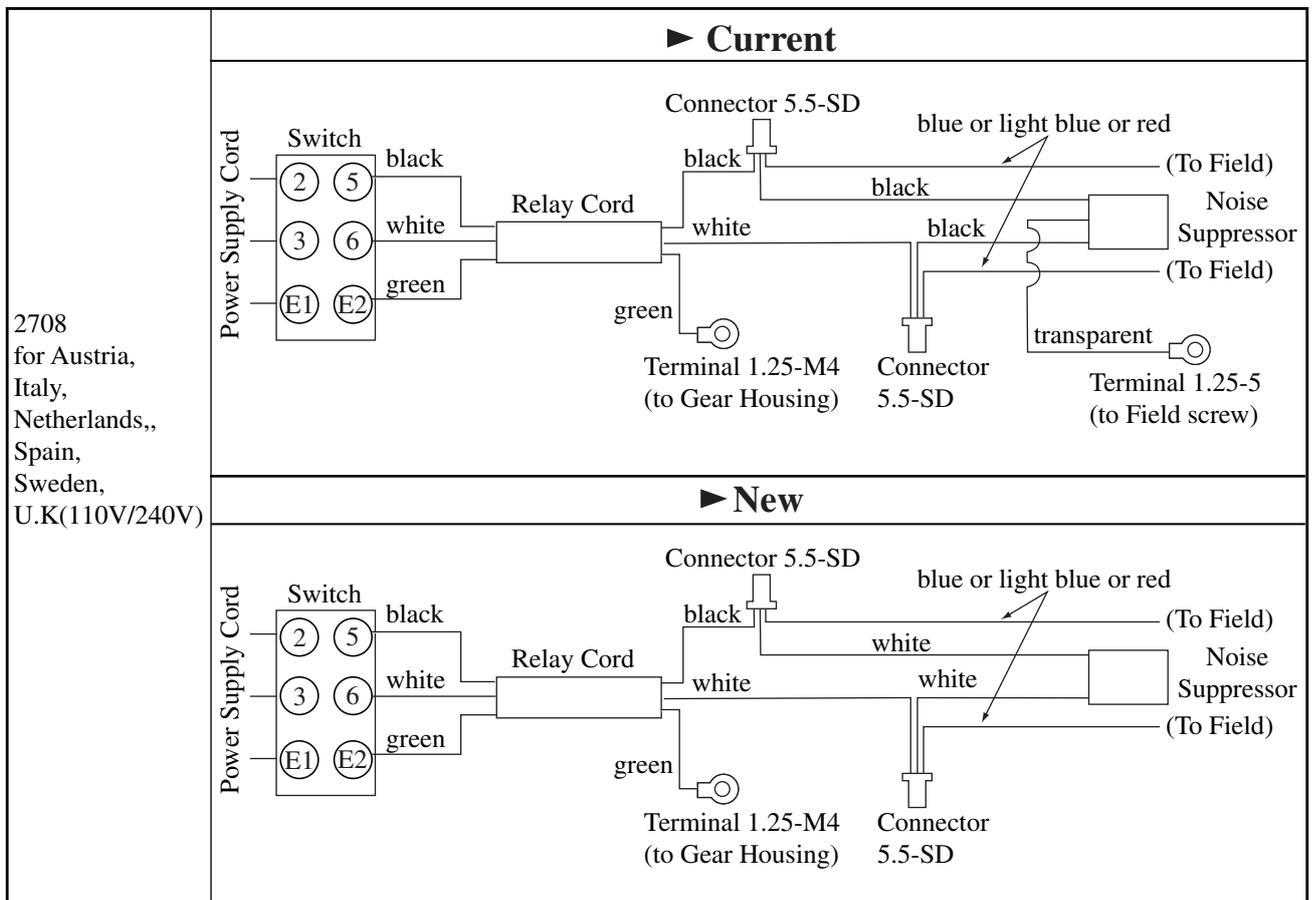


2708  
for South Africa,  
Australia

► Current

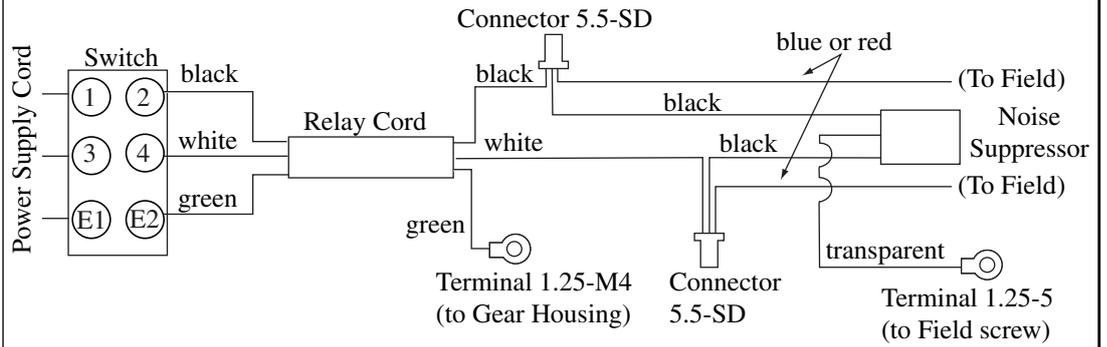


► New

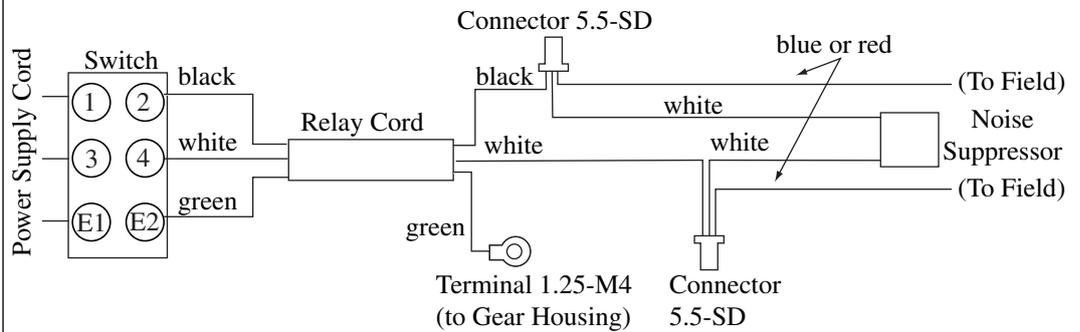




2708  
for Germany



► Current



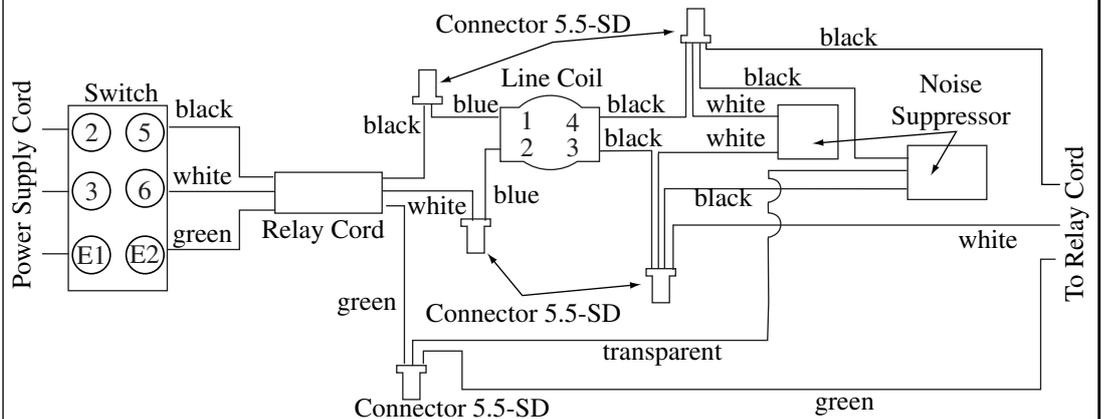




► New

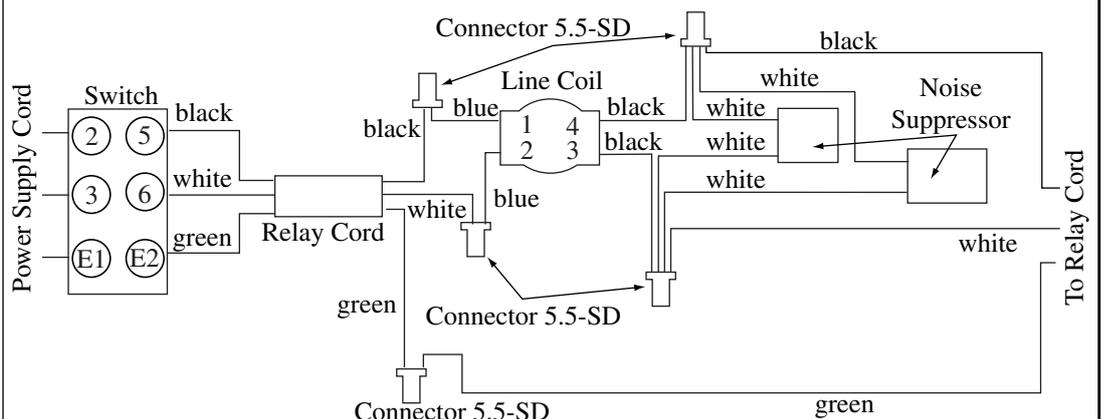

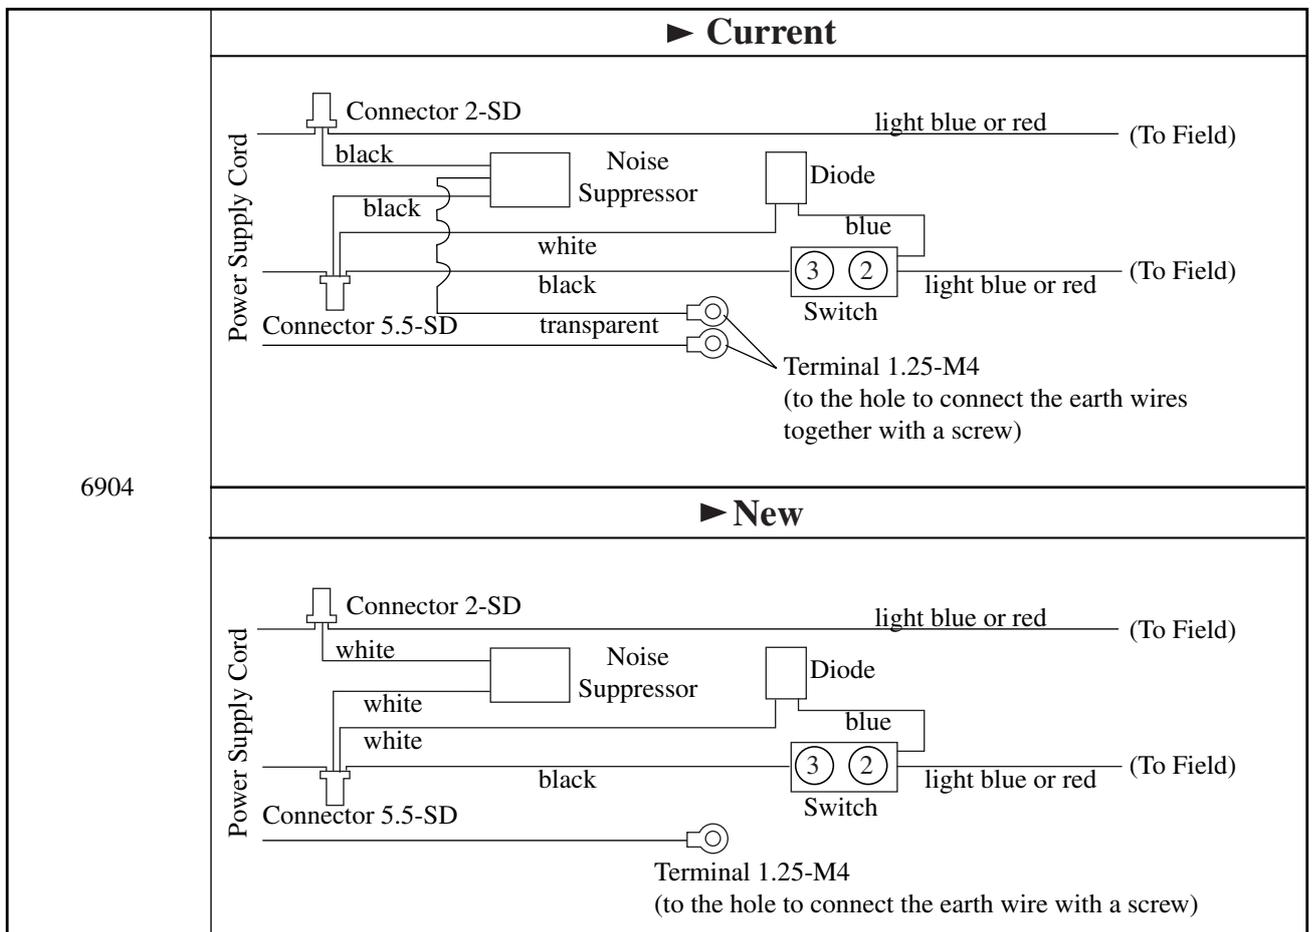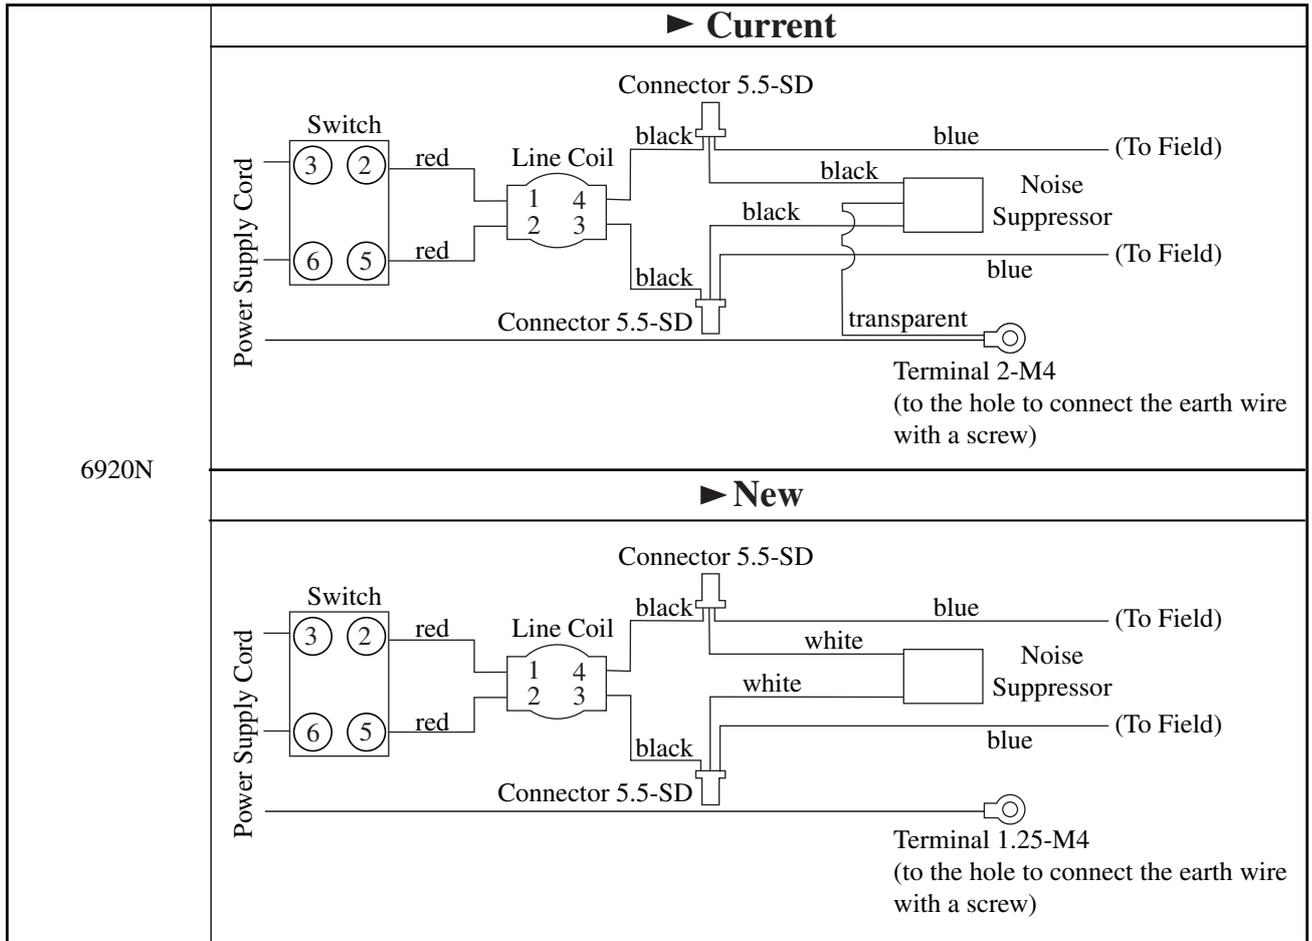

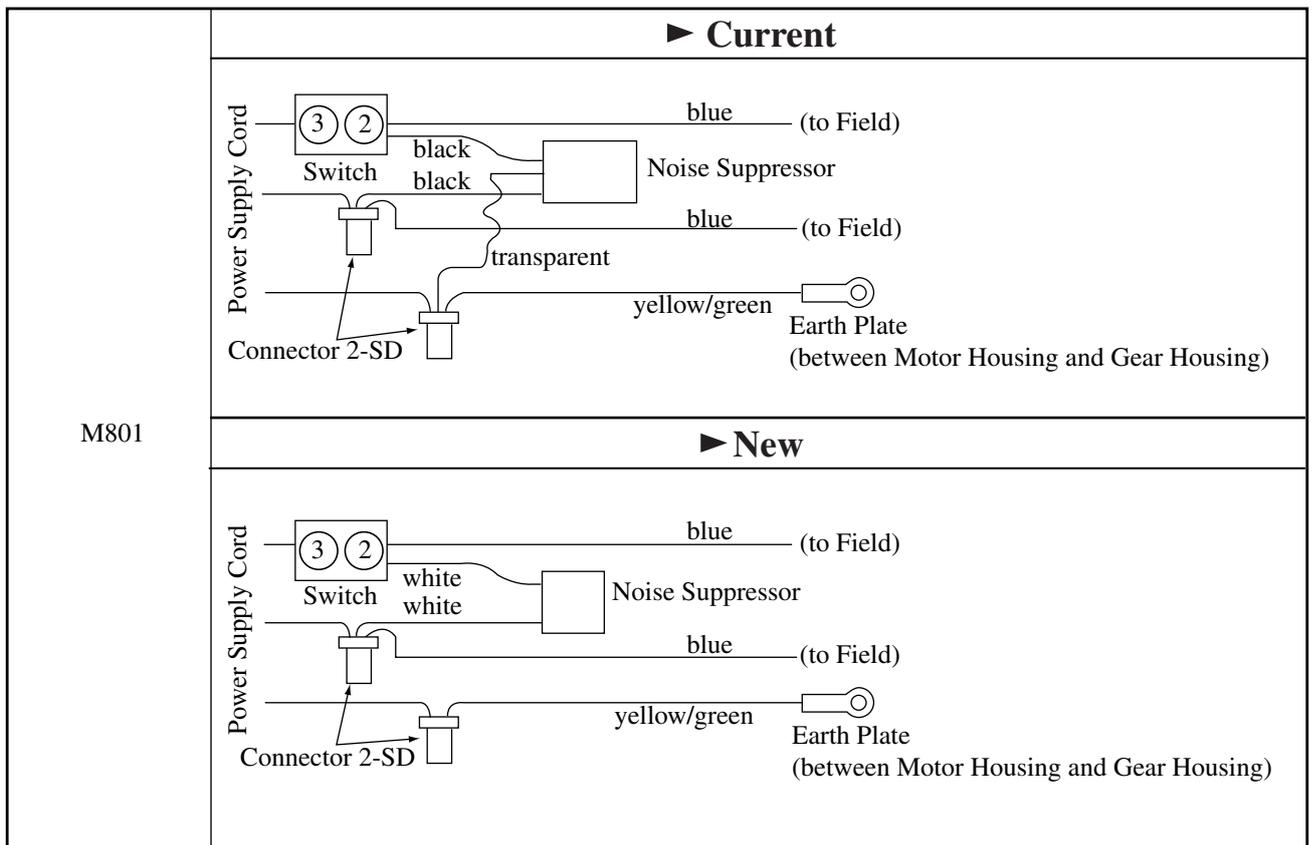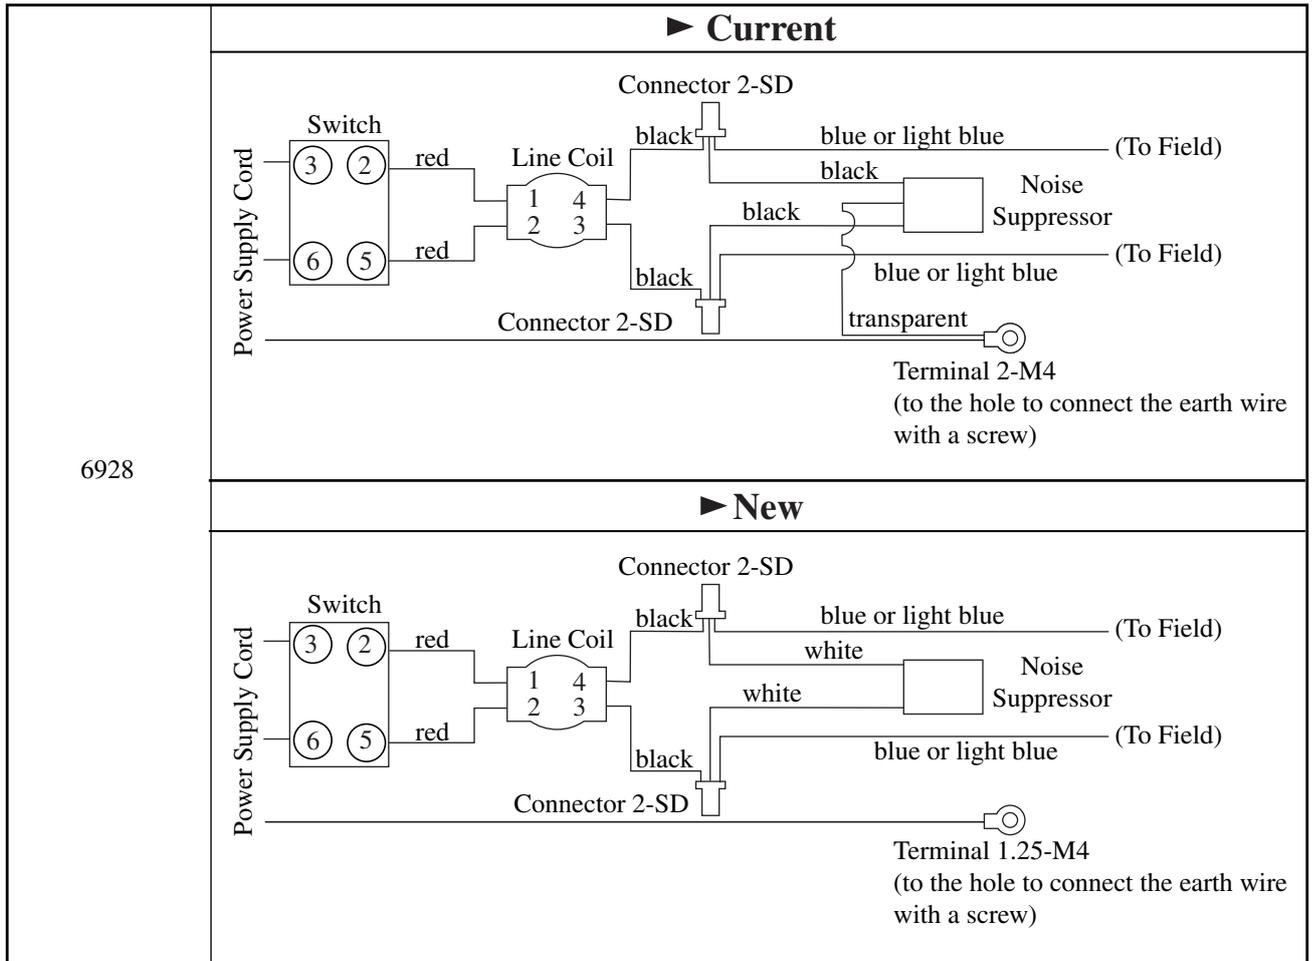

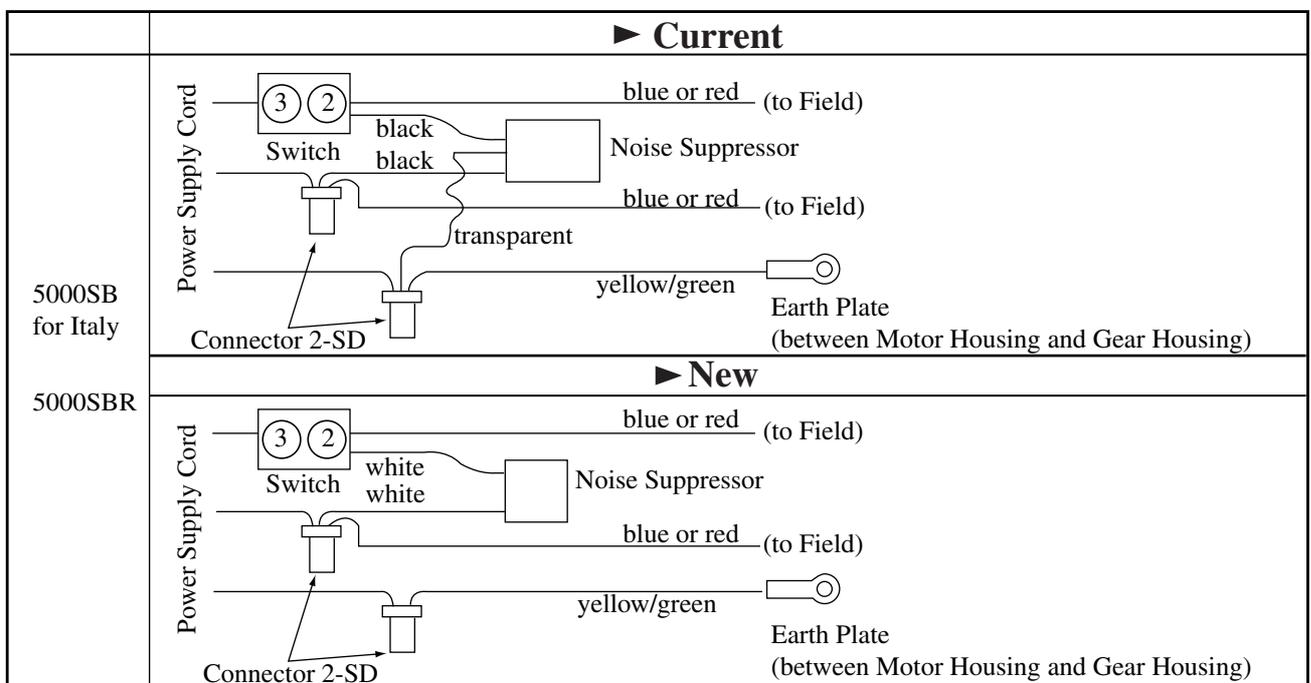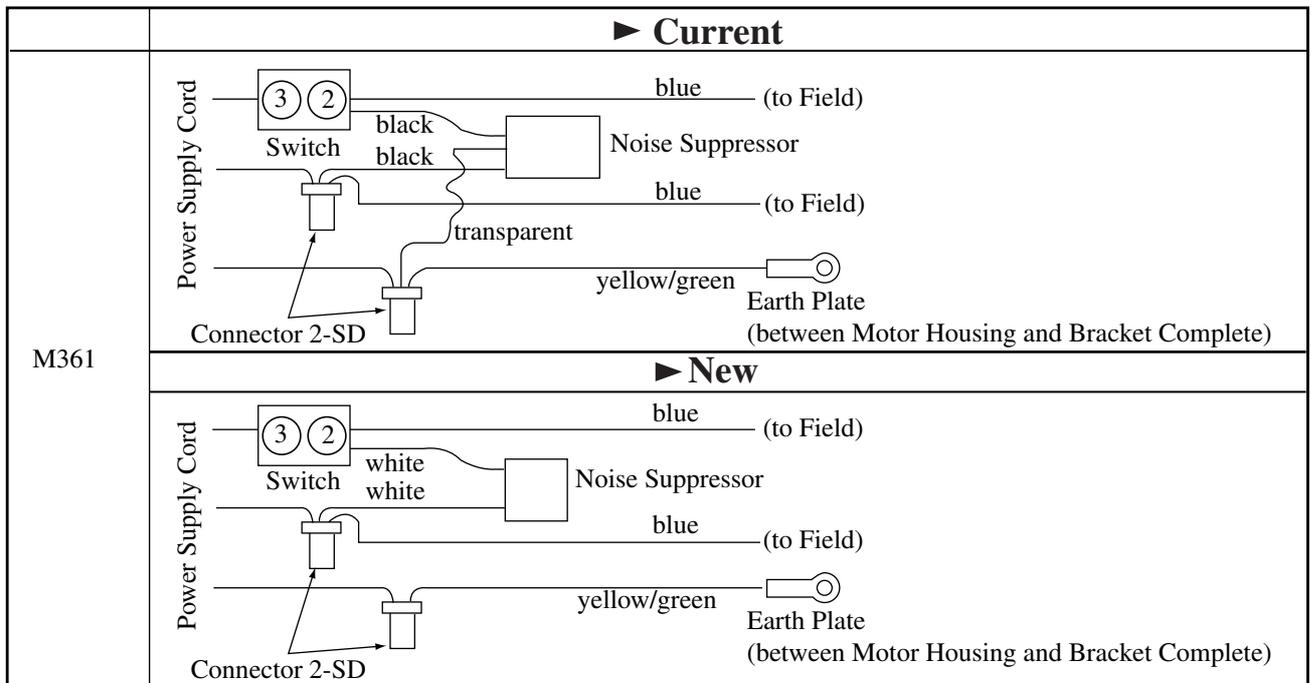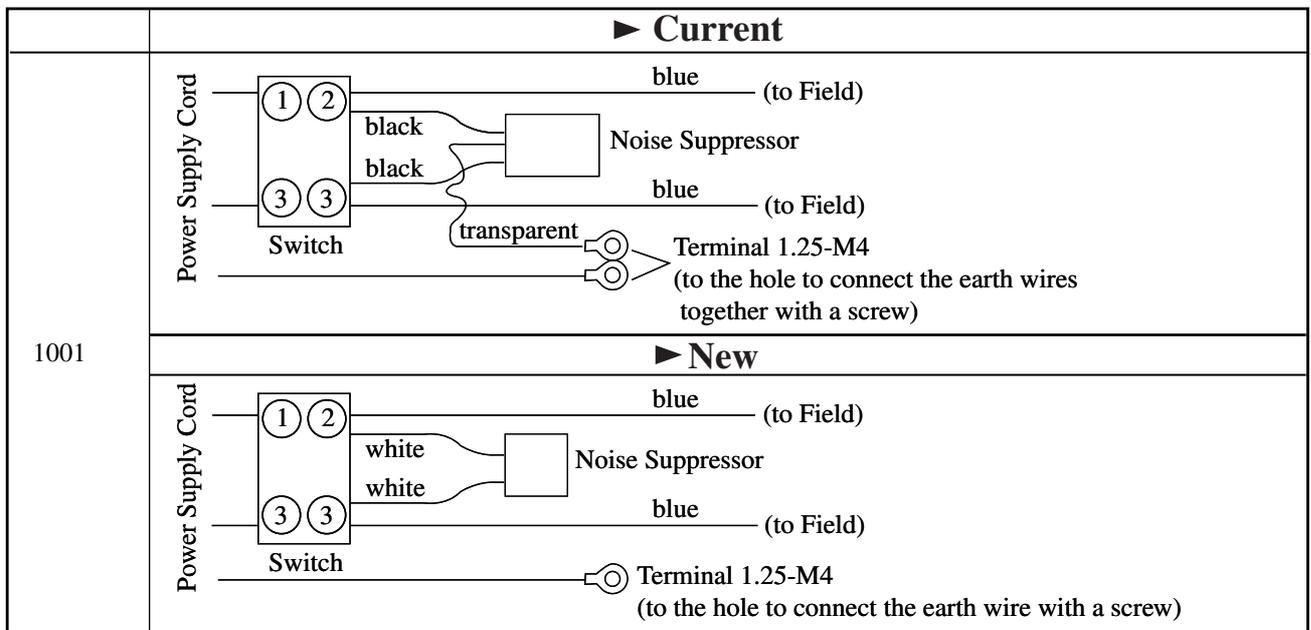

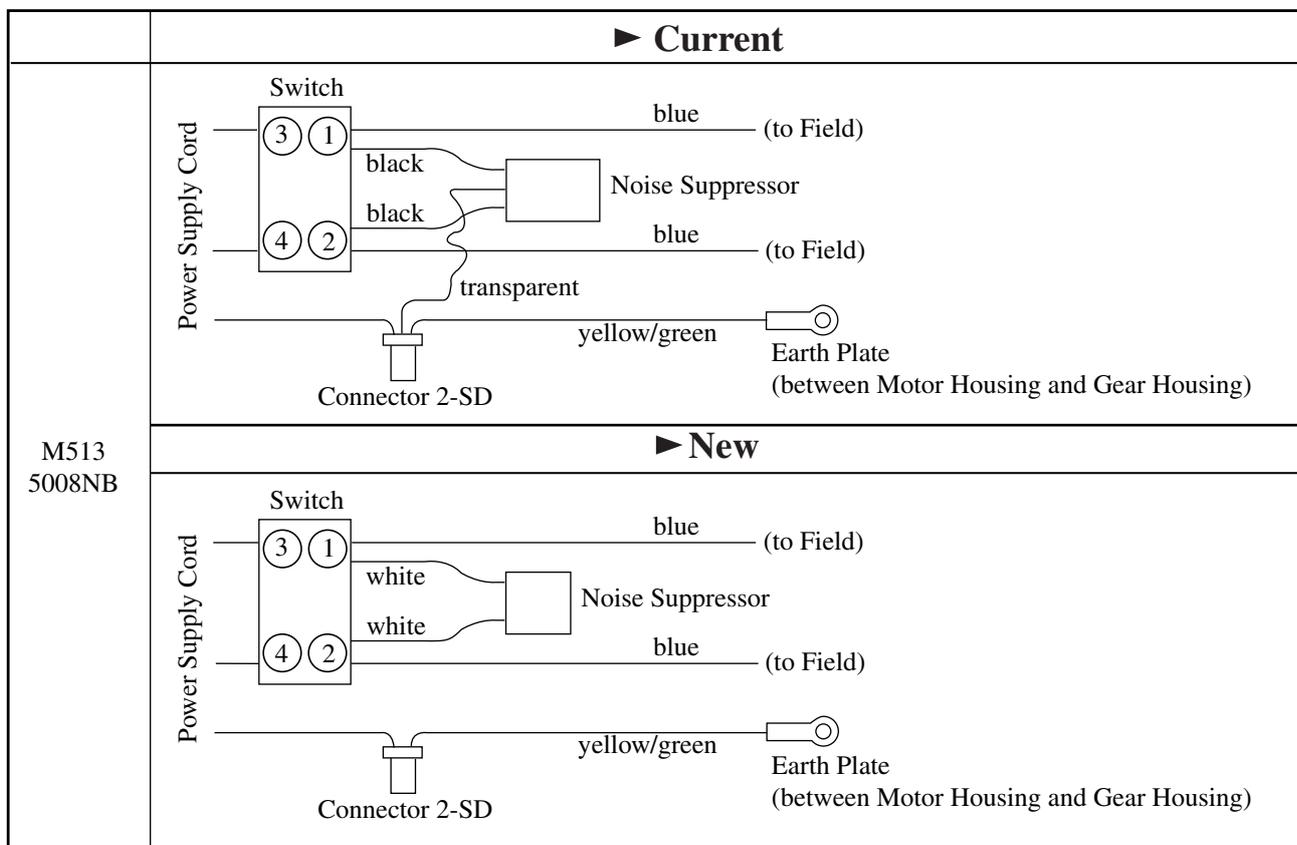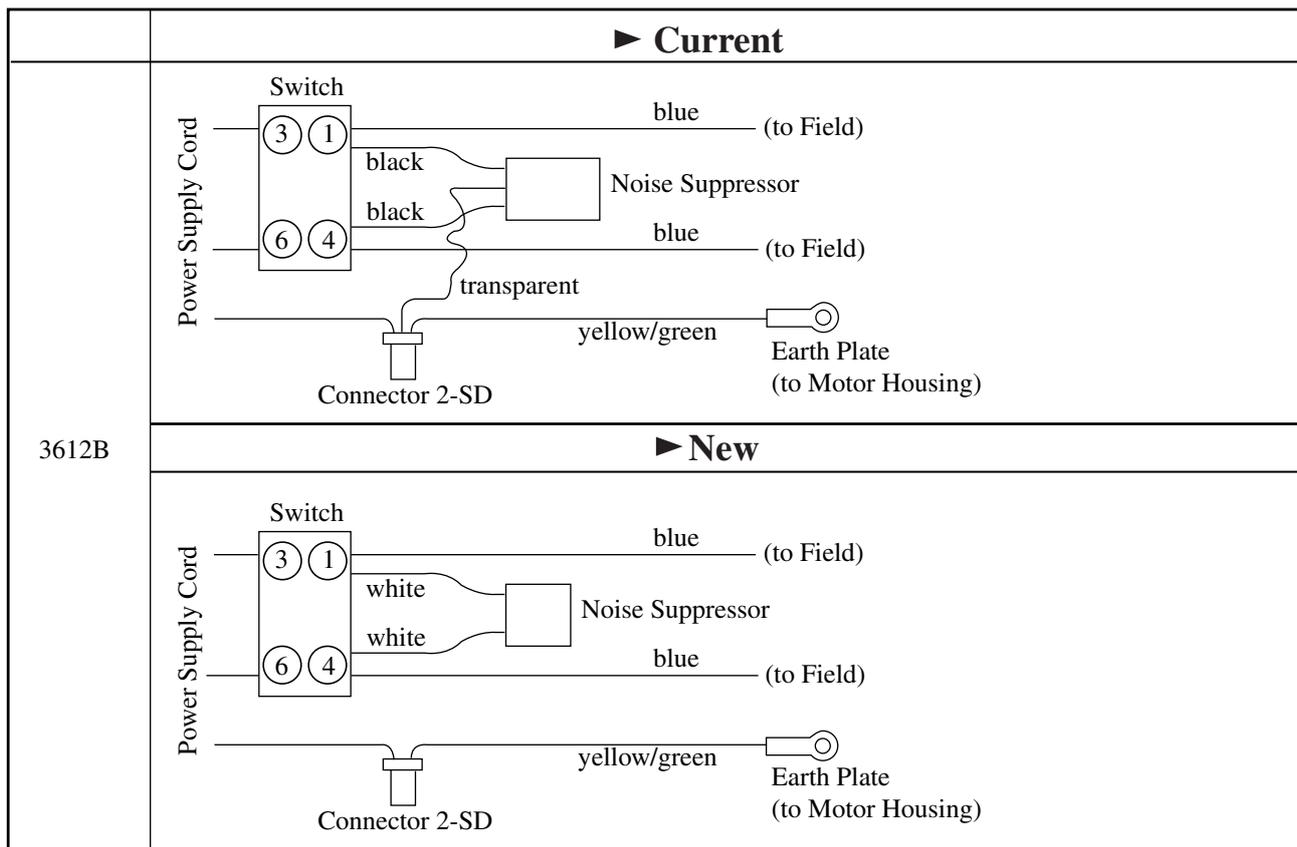

**Country**

Model	Country
3612B, 401, 5000SBR, 5008NB, M242, M361, M431, M513, M801, M902, M903, M921, M923, M952	Italy
6928	Germany, U.K.(110V)
6920N	Germany
6904	U.K.(240V, 110V)
1001, 3800NA	France
2708	Austria, Germany, Italy, Netherlands, Spain, Sweden, U.K.(240V, 110V), South Africa, Australia,
5000SB	Italy, New Zealand
1804N, BO6010	New Zealand
JG1600	Austria, Finland, France, Italy, Norway, Sweden, U.K.(240V, 110V), New Zealand,
DA3000	Austria, Finland, France, Germany, Italy, Netherlands, Norway, Sweden, U.K.(240V, 110V), New Zealand
JN1600, JS1600	U.K.(240V, 110V)
2012	Australia
2416S	Australia, Netherlands, New Zealand
5500S	Austria, Greece, Germany, Italy, France, Netherlands, Spain

**Interchangeability(I/C)**

Item No.	Current part		Q'ty	I/C	New part		Q'ty	Note
036	Noise Suppressor 645169-9		1	No	Noise Suppressor 645200-1		1	1001
1001: 702 6904: 704	Terminal 1.25-M4 654002-4		1					1001, 6904
Current: 712 New: 709	Terminal 2-M4 654005-8		1	No	Terminal 2-M4 654002-4		1	6920N, 6928
706	Terminal 1.25-5 654003-2		1					2708(for Austria, Italy, Netherlands, Spain, Sweden, U.K.(240V, 110V), South Africa, Australia)
See below	Noise Suppressor 645169-9		1	No	Noise Suppressor 645105-5		1	5000SB(for Italy only), 2708, 3612B, 5000SBR, 5008NB, 6904, 6920N, 6928, M361, M513, M801
903	Line Coil 646330-1		1	←	Line Coil 646329-6		1	1804N
708	Connector 2-SD 654509-0		2	No	Connector 5.5-SD 654510-5		2	
See below	Noise Suppressor 645169-9		1	Yes	Noise Suppressor 645209-3		1	401, BO6010, DA3000, JG1600, JN1600, JS1600, M242, M431, M902, M903, M921, M923, M952
See below	Noise Suppressor 645169-9		1	Yes	Noise Suppressor 645261-1		1	1804N, 2012, 2416S, 3800NA, 5500S

**Interchangeability mark ;**

The arrow ← means that the new part is substituted for the current.

Item No. of Noise Suppressor (Pt. No. 645105-5)

Model	2708	3612B	5000SB	5000SBR	5008NB	6904	6920N	M361	M513	M801
Item No.	080	037	007	004	038	048	096	027	018	047

Item No. of Noise Suppressor (Pt. No. 645209-3)

Model	401	DA3000	JG1600	JN1600	JS1600	M242	M431	M902	M903	M921	M923	M952
Item No.	044	040	049	039	043	025	006	020	020	014	014	013

Item No. of Noise Suppressor (Pt. No. 645261-1)

Model	1804N	2012	2416S	5500S
Item No.	009	031	037	041

## Implementation

1804N, 2416S, 5500S, JN1600, JS1600: To be informed later  
1001: Discontinued since Apr.,1993  
2012: Discontinued since May,2001  
2708: Discontinued since Apr.,1999  
3612B: Discontinued since Jun.,1991  
3800NA: Discontinued since Apr.,1992  
401: Discontinued since Nov.,1992  
5000SB: Discontinued since Apr.,1989  
5000SBR: Discontinued since Jun.,1991  
5008NB: Discontinued since Oct.,1993  
6904: Discontinued since Dec.,1985  
6920N: Discontinued since Oct.,1993  
6928: Discontinued since Jul.,1992  
BO6010: Discontinued since Oct.,2000  
DA3000: Discontinued since Apr.,1993  
JG1600: Discontinued since Apr.,1993  
M242: Discontinued since Aug.,1991  
M361: Discontinued since Apr.,1993  
M431: Discontinued since Jun.,1991  
M513: Discontinued since Jun.,1991  
M801: Discontinued since Apr.,1992  
M902: Discontinued since Apr.,1992  
M903: Discontinued since Sep.,1992  
M921: Discontinued since Jun.,1991  
M923: Discontinued since Jun.,1991  
M952: Discontinued since Apr.,1992