

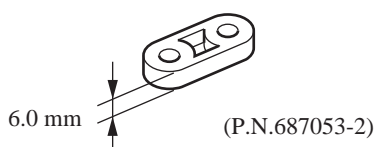


**Subject** ▶ Change on Power Supply Cord

**For Models** ▶ 4101RH

**Note** ▶ This information applies to the countries described below.

**Description** ▶ As illustrated below, Power Supply Cord, Cord Guard and Strain Relief have been changed.

		CURRENT	NEW
Power supply cord		DRAKA KABEL(QR) 1.0mm, Rubber Cord Diameter : $\phi 9.3$	EN(H07RN-F) 1.0mm, Rubber Cord Diameter : $\phi 9.0$
Cord guard 		Neck Diameter : $\phi 17$ , Inner Diameter : $\phi 9.3$ (P.N. 682516-3)	Neck Diameter : $\phi 17$ , Inner Diameter : $\phi 10$ (P.N. 682504-0)
Strain Relief	Pitch : 20mm		

## Interchangeability(I/C)

Item No.	Current part		Q'ty	I/C	New part		Q'ty	Note
049	Strain Relief 687052-4		1	No	Strain Relief 687053-2		1	Italy, Austria, Algeria, Spain, Sweden, Germany, France, Reunion, Russia, Netherlands, U.K.(110V/240V)
051	Cord Guard 682516-3		1	No	Cord Guard 682504-0		1	

## Implementation

4101RH : From serial No.2601E (Jan., 1999)