

# T ECHNICAL INFORMATION



PRODUCT

P 1 / 7

**Models No.** ▶ 6934FD

**Description** ▶ Cordless Impact Wrench

## CONCEPT AND MAIN APPLICATIONS


The above product has been developed as a 14.4V version of the existing model 6918D.

Its features and benefits are as follows.

- \* Increased amount of work with 14.4V battery.
- \* Max. fastening torque : 140N.m
- \* Built-in job light

The variation of this model is as listed below.

Model No.	Battery			Charger
	Type No.	Cell	Q'ty	
6934FDWAE	1422 (2.0Ah)	Ni-Cd	2 pcs.	DC1414
6934FDWDE	1434 (2.6Ah)	Ni-Cd		
These 2 models come with battery cover and plastic carrying case in addition to the above charger and battery.				

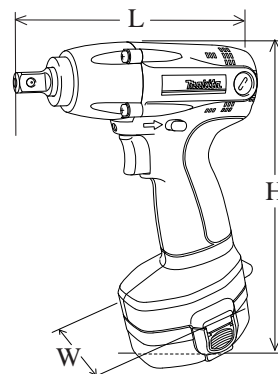

Dimensions : mm ( " )	
Length ( L )	173 (6-13/16)
Width ( W )	94 (3-11/16)
Height ( H )	238 (9-3/8)

## ► Specification

<b>Voltage (V)</b>		14.4
<b>No load speed (min.<sup>-1</sup>=rpm)</b>		0 - 2,300
<b>Impact per minute (min.<sup>-1</sup>=bpm)</b>		0 - 3,000
<b>Square drive : mm ( " )</b>		12.7 (1/2)
<b>Capacities</b>	<b>Standard Bolt</b>	M8 - M16(5/16" - 5/8")
	<b>High Tensile bolt</b>	M6 - M12(1/4" - 15/32")
<b>Max. fastening torque : N.m (in.lbs)</b>		140 (1,240)
<b>Electric brake</b>		Yes
<b>Variable switch</b>		Yes
<b>Reverse switch</b>		Yes
<b>Net weight: kg (lbs)</b>		1.7 (3.7)

## ► Standard equipment

- \* Battery cover ..... 2 pcs.
  - \* Socket 19-38 ..... 1 pc.
  - \* Pin 4 ..... 1 pc.
  - \* O ring 24 ..... 1 pc.
- } Comes without these items for North American countries.

< Note > The standard equipment for the tool shown may differ from country to country.


< Note > The standard equipment for the tool shown may differ from country to country.

## ► Optional accessories

- \* Battery 1420 (Ni-Cd 14.4V, 1.3Ah)
- \* Battery 1422 (Ni-Cd 14.4V, 2.0Ah)
- \* Battery 1434 (Ni-MH 14.4V, 2.6Ah)
- \* Battery 1435 (Ni-MH 14.4V, 3.0Ah)
- \* Charger DC 1413
- \* Charger DC 1414
- \* Charger DC 1439
- \* Charger DC 1470
- \* Charger DC 1803
- \* Charger DC 1804
- \* Automotive charger CD1422

## ► Features and benefits

**6934FD**

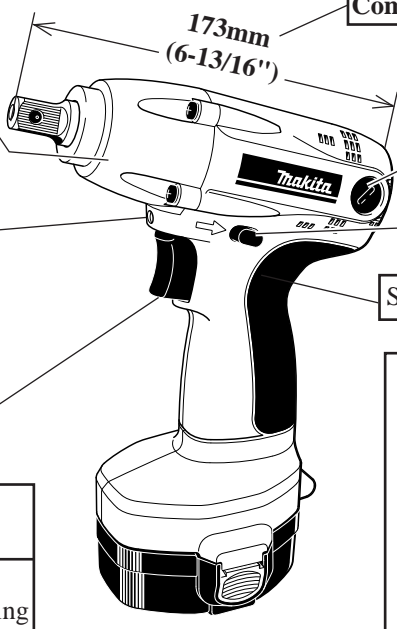


**Compact size in this class**

173mm  
(6-13/16")

**Powerful, Max. Torque : 140 N.m**

**Magnesium alloy hammer case**



**Built-in LED Job Light**  
for shining your working  
point in shadow

**Variable speed control switch**

**Externally accessible carbon brush**

**Push button for reversing**

**Soft Grip for comfortable control**

**So long service life to fasten 100,000 screws or bolts.**

In case of the product of the competitor D, the following troubles arise with the fastening of 10,000 - 40,000 screws or bolts.

- \* Breakage of switch by the vibration
- \* The end of the service life of carbon brush, in other words, the end of the service life of DC motor itself
- \* The battery falls out of the machine easily, due to wear on the battery holder.

**D28 Type DC motor with the following features.**


- \* Rare earth metal magnet
- \* Efficient cooling
- \* Externally accessible carbon brush extends the motor life 2 times longer than the competitor's product. Furthermore MAKITA's replaceable armature makes the tool life even beyond the motor life.

## ► Comparison of products

Model No. Specifications		MAKITA		Competitor A	Competitor B
		6934FD	BTW150	Model G	Model H
Battery	Voltage : V	14.4	14.4	14.4	14.4
	Current capacity : Ah	2.6	2.0	1.7	2.4
	Energy capacity : Wh	37.4	28.8	24.5	34.6
	Battery cell	Ni-MH	Ni-MH	Ni-Cd	Ni-Cd
Charging time : min.		Approx. 60	Approx. 30	Approx. 45	Approx. 60
Square drive : mm (")		12.7 (1/2)	12.7 (1/2)	12.7 (1/2)	12.7 (1/2)
Max. fastening torque : N.m (in.lbs)		140 (1,240)	150 (1,330)	175 (1,550)	160 (1,400)
No load speed (min.=rpm)		0 - 2,300	0 - 2,300	0 - 2,400	0 - 2,200
Impact per minute (min.=bpm)		0 - 3,000	0 - 3,000	0 - 3,000	0 - 2,500
Material of hammer case		Magnesium alloy	Aluminum	Magnesium alloy	Aluminum
Built-in LED Job light		Yes	No	No	No
Externally accessible brush		Yes	Yes	No	No
Soft grip		Yes	Yes	Yes	Yes
Dimensions	Length : mm ( " )	173 (6-13/16)	193 (7-5/8)	168 (6-5/8)	195 (7-5/8)
	Width : mm ( " )	94 (3-11/16)	78 (3-1/16)	82 (3-1/4)	85 (3-3/8)
	Height : mm ( " )	238 (9-3/8)	253 (10)	235 (9-1/4)	243 (9-9/16)
Net weight		1.7 (3.7)	1.9 (4.2)	1.8 (4.0)	2.0 (4.4)
Standard equipments	Battery	Yes 2 pcs.	Yes 1 ps.	Yes 2 pcs.	Yes 2 pcs.
	Battery cover	Yes	No	Yes	Yes
	Charger	Yes DC1414	Yes DC14SA	Yes	Yes

## < 1 > Lubrication

Apply MAKITA grease N. No.2 to the following portions designated by black triangle to protect parts and product from unusual abrasion.

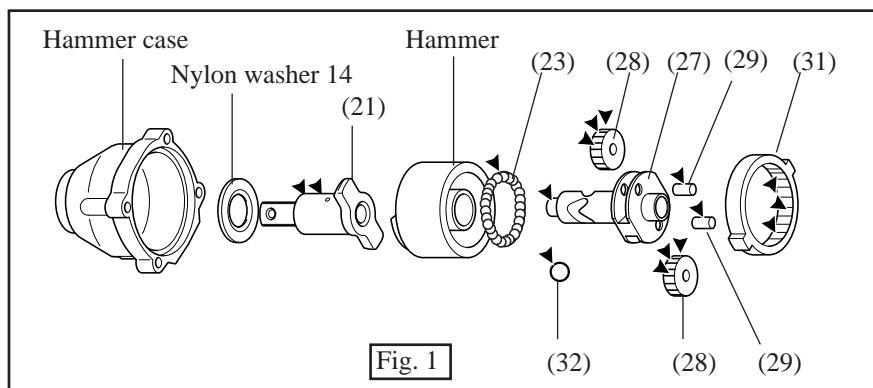

Position No.	Parts item	Portion to be lubricated	Amount : g (oz)
21	Anvil	Cylindrical portion	0.5 (0.02)
23	26 pcs. of Steel ball 3.5		0.5 (0.02) in total
27	Spindle	The cylindrical portion where (21) anvil contacts	0.5 (0.02) in total
28	Spur gear 22	Teeth portion	2.0 (0.07)
29	Pin 5	Cylindrical portion	0.5 (0.02)
31	Internal gear 51	The portion where (28) spur gear 22 engages.	0.5 (0.02)



## < 2 > Removing housing R and L

Remove hammer case from housing R and L.

And then, housing R and L can be removed.



## < 3 > Disassembling hammer and spindle section

- (1) Press down hammer with 1R045: Large gear extractor by turning the handle.
  - (2) Adjust the opening for steel ball inserting to the cam groove top of spindle.
  - (3) Take off 2 pcs. of steel ball 5.6 from spindle. See Fig. 5.
  - (4) Hold the hammer section as illustrated in Fig. 6. And loose the handle of large gear extractor.
- < Caution > Do not hold gear extractor as illustrated in Fig. 5, when loosening the handle of gear extractor. Because, steel balls 3.5 can fall out of hammer unintentionally.

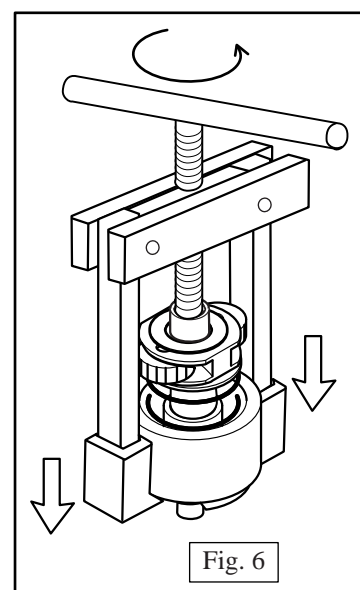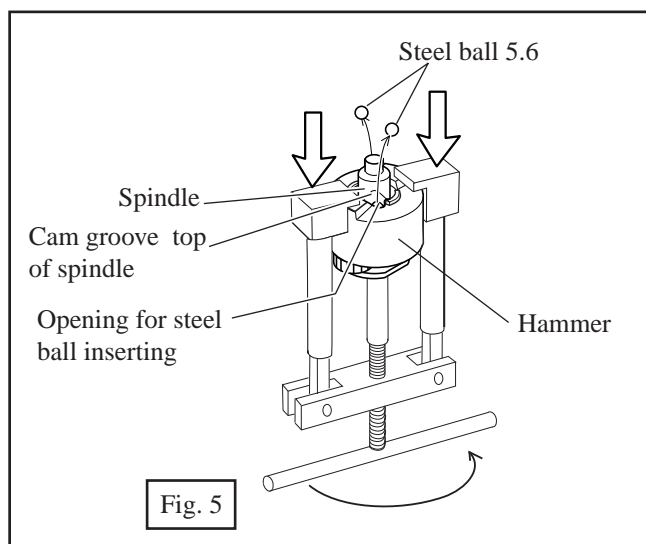

(5) Now hammer section can be disassembled as illustrated in Fig. 7.



(6) After removing flat washer 24, steel balls 3.5 can be taken out from hammer. See Fig. 8.

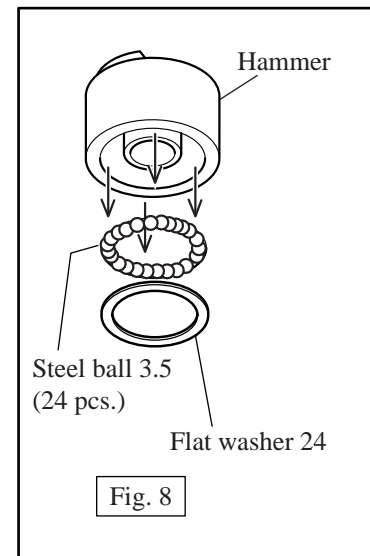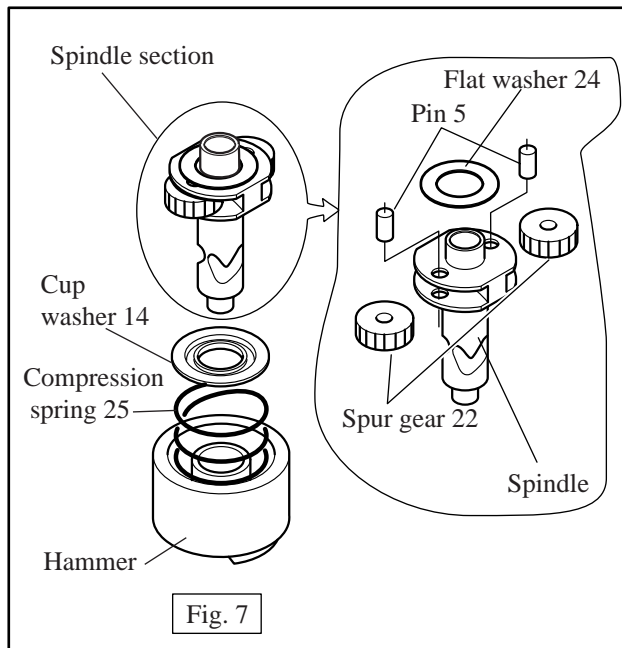



#### < 4 > Assembling hammer and spindle section

(1) Put 24 pcs. of steel ball 3.5 into hammer, and cover them with flat washer 24. See Fig. 9.

(2) Mount 2 pcs. of spur gear 22 to spindle and pass 2 pcs. of pin 5 (as a gear shaft) through spindle and spur gears 22. Mount flat washer 24 to the spindle. Now the spindle section has been completed. See Fig. 10. Put compression spring 25 and cup washer 14 on the hammer. Mount the spindle section to the hammer as illustrated in Fig. 10.



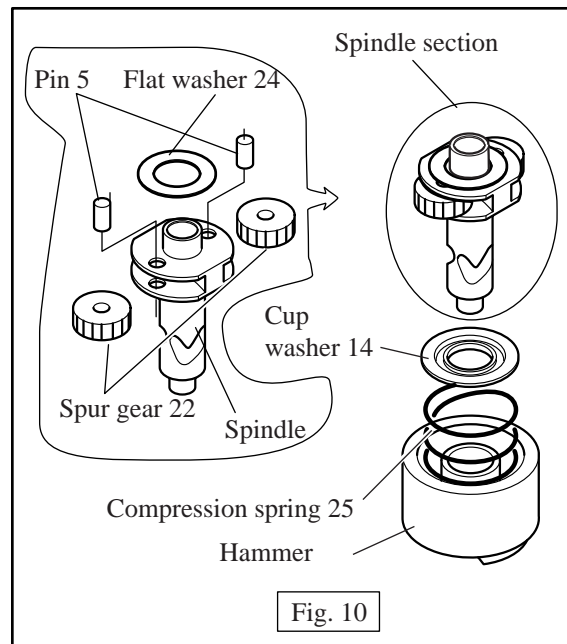
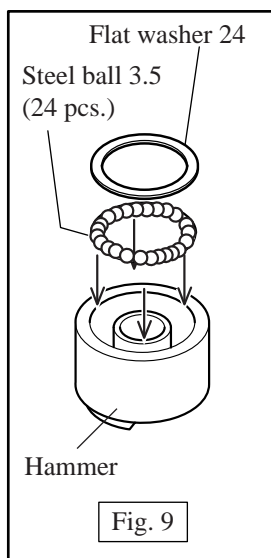


- (4) Mount 2 pcs. of steel ball 5.6 to the cam groove top which has been aligned with the opening of hammer, wheel holding the large gear extractor as illustrated in Fig. 11A.
- (3) Press the hammer toward the spur gear 22 side with No.1R045 "Large Gear Extractor" in order to reserve the opening for mounting steel balls 5.6. See Fig. 11.

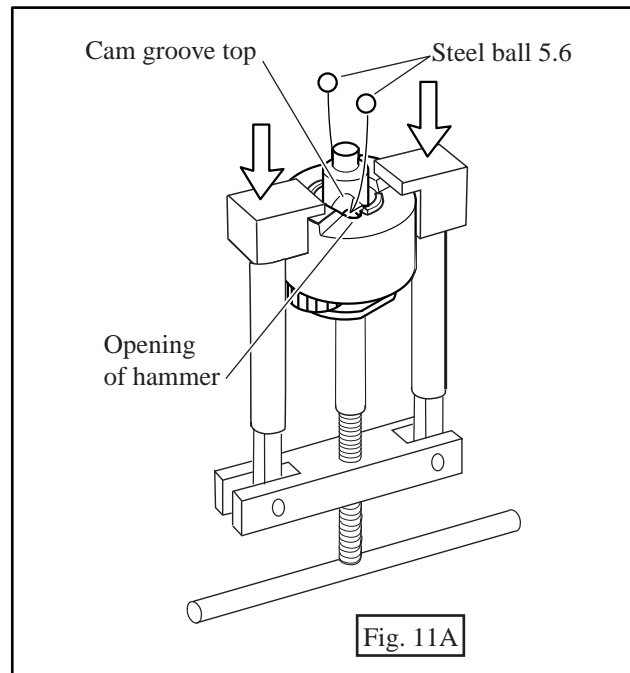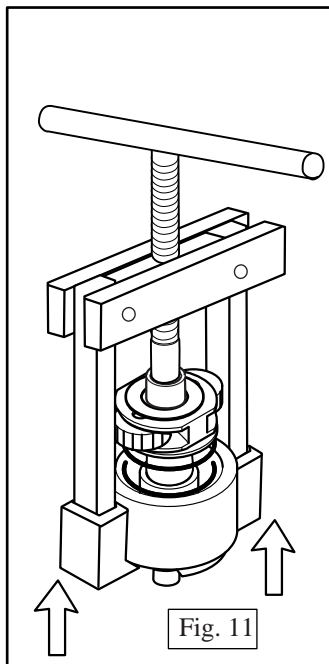

## < 5 > Assembling the body


- (1) Mount a rubber pin 4 to housing R, and another rubber pin 4 to housing L. See Fig. 12A
- (2) When securing housing R and L with 8 pcs. of tapping screw bind PT3x16, fasten the screws with the fastening torque of 1.1 - 1.3N.m (11 - 13 kgf.cm).
- (3) When securing hammer case with 4 pcs. of tapping screw 4x25, fasten the screws with the fastening torque of 1.76 - 2.16N.m (18 - 22 kgf.cm). The 4 pcs. of tapping screw 4x25 have to be fasened diagonally. See Fig. 12C.
- (4) When securing FET and FET spacer with tapping screw ST3x8, fasten the screw with the fastening torque of 1.1 - 1.5N.m (11 - 15 kgf.cm). See Fig. 12B

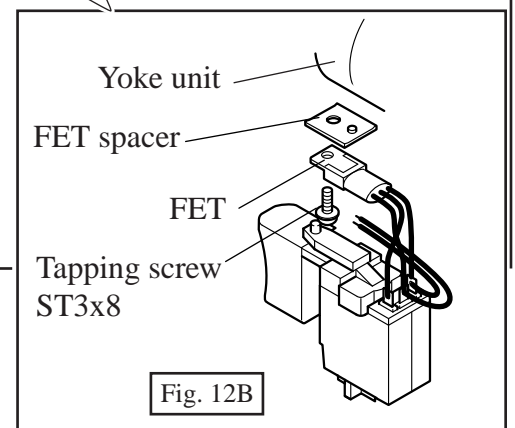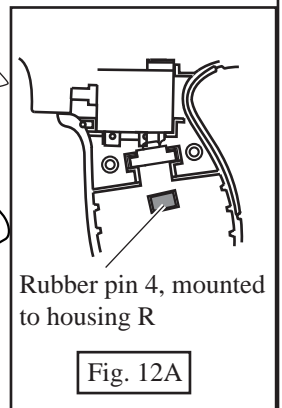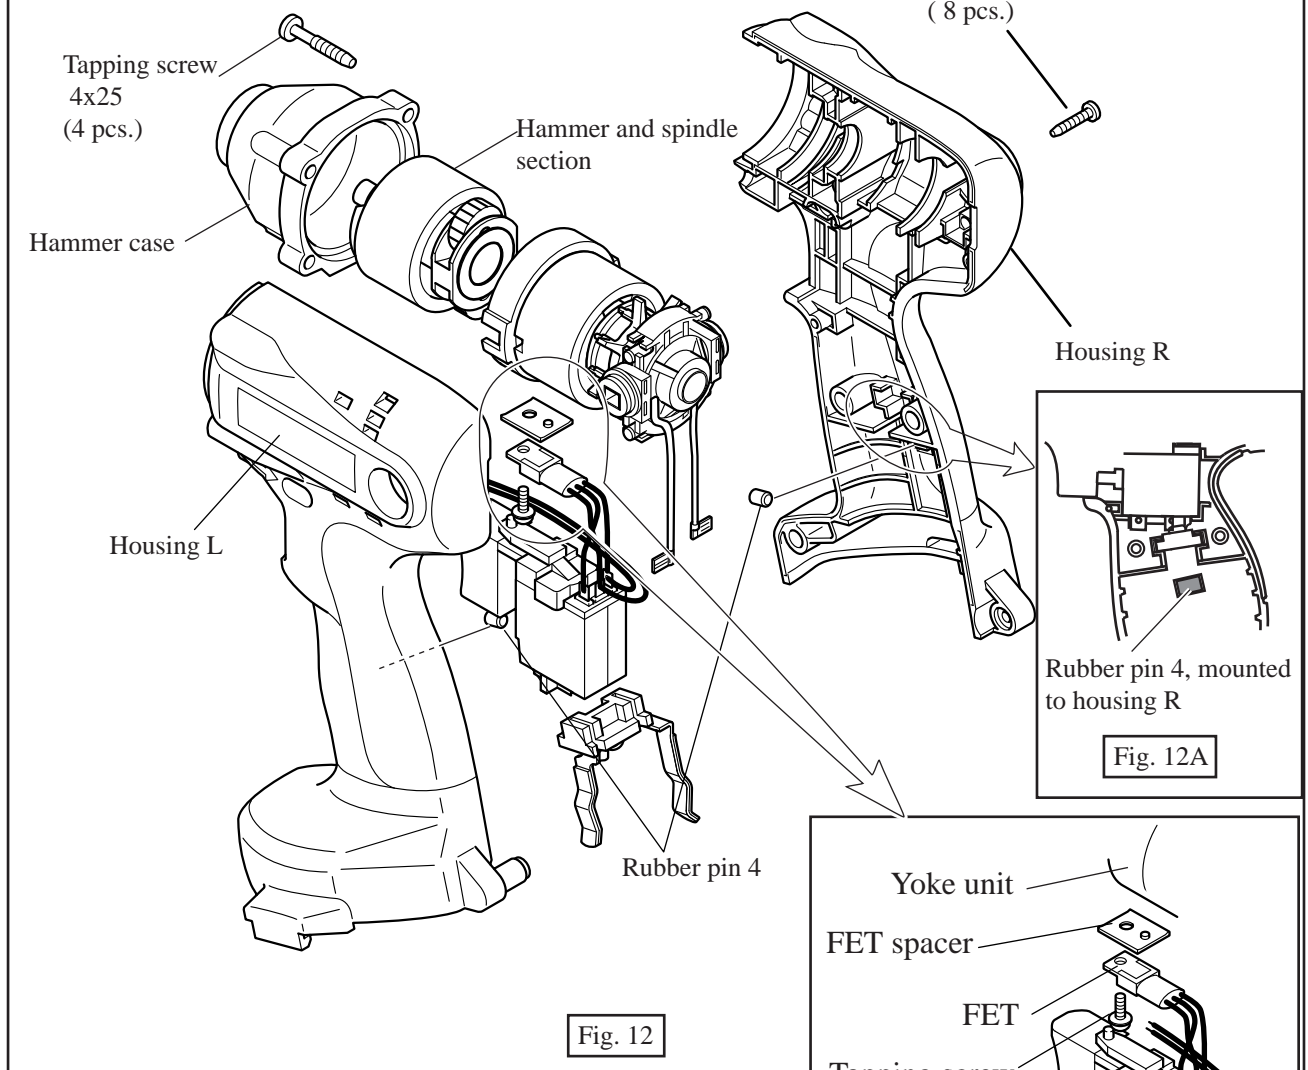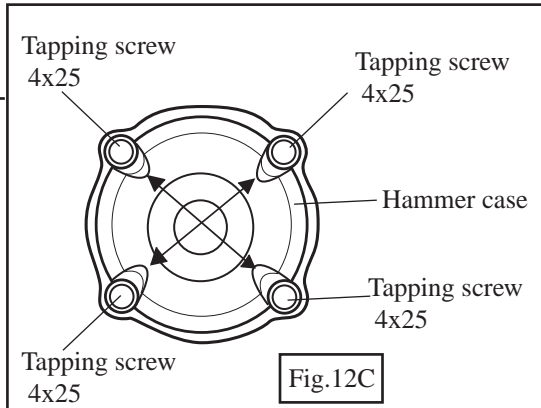


## ▶ Circuit diagram

P 7 / 7

Color index of lead wires' sheath	
Black	
Red	

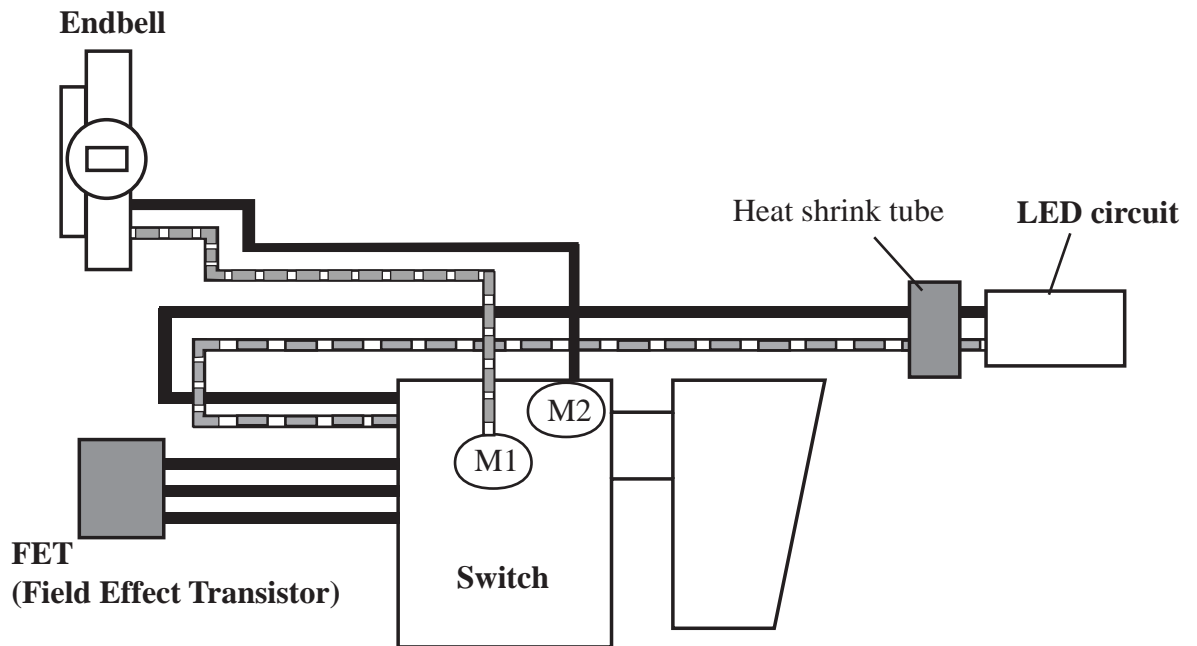

## ▶ Wiring diagram

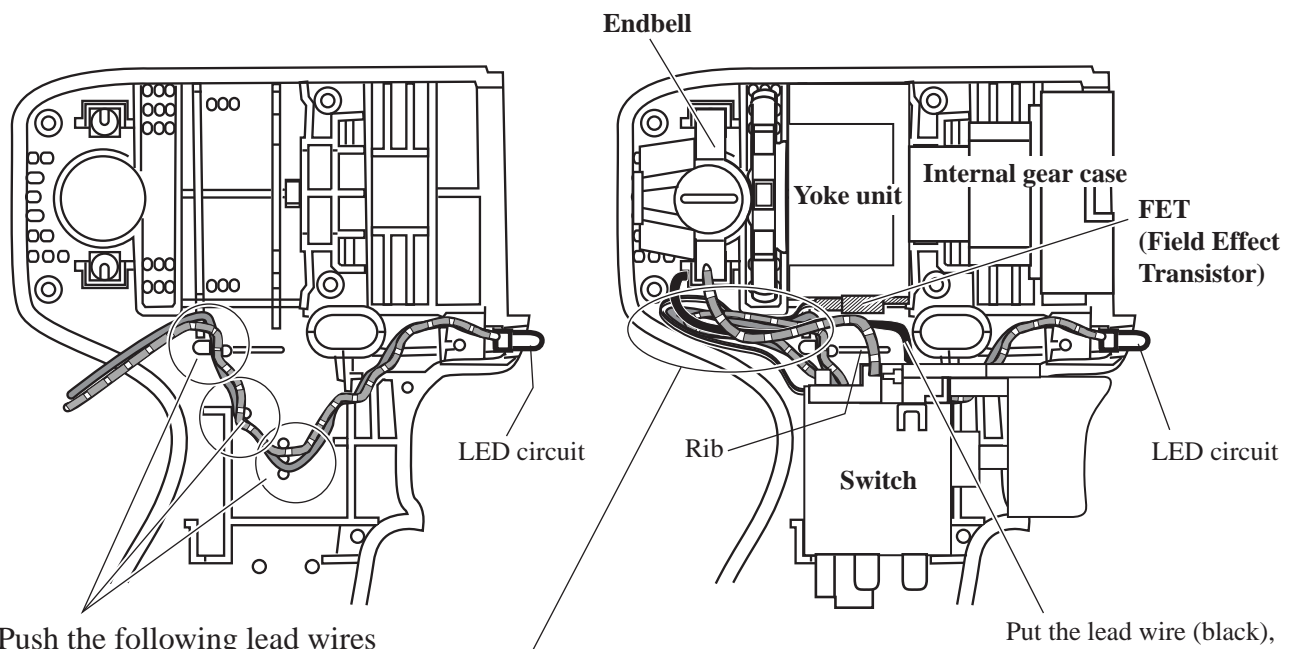

Push the following lead wires deep into the lead holders as illustrated above.

- \* LED lead wire (black)
- \* LED lead wire (red)

Put the slack portion of the following lead wires in this space.

- \* FET lead wires (black)
- \* LED lead wire (red)
- \* LED lead wire (black)

Put the lead wire (black), connecting endbell and switch, under the same lead wire (red) and pass it through the space between rib and FET.