



**Subject** ▶ Change on housing, etc.

**For Models** ▶ 6903VD/VDW (Cordless Impact Driver)


**Description** ▶ 1. The quantity of vents in the housing will be increased.

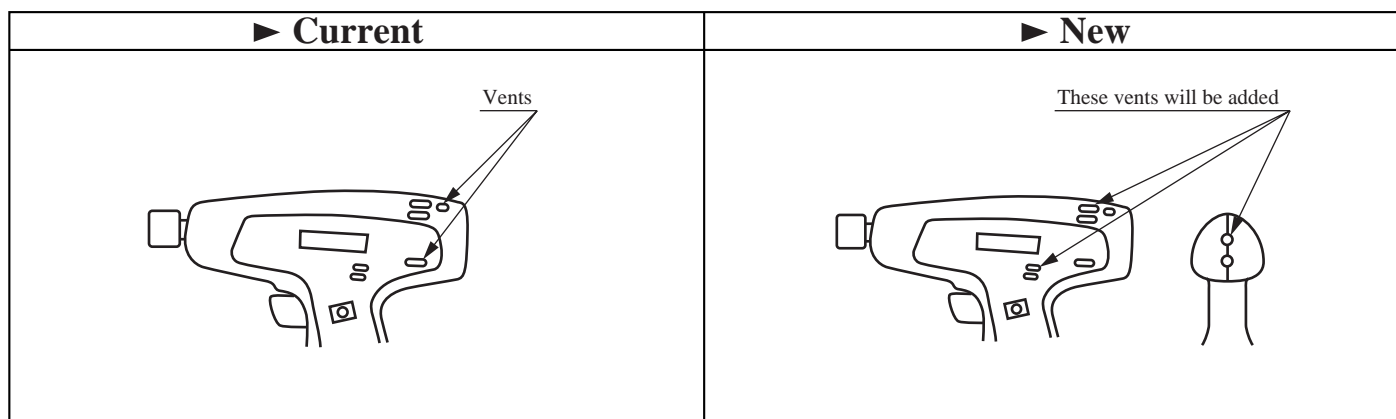

2. The rubber sheet (constituent part of housing) under the motor will be discontinued.

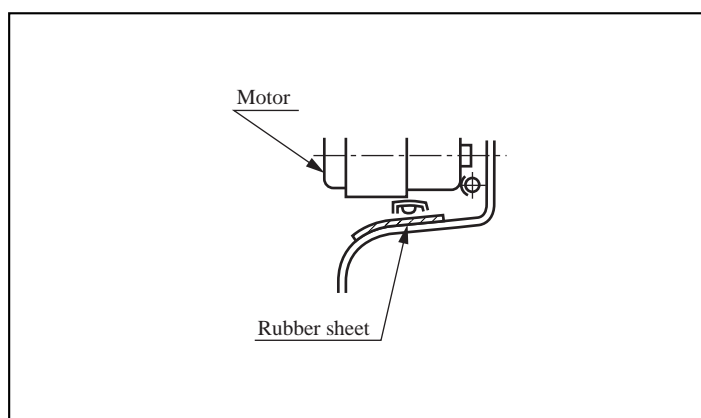

3. The screw which secures the set plate will be changed from 20 mm (25/32") to 22 mm (7/8") in length.

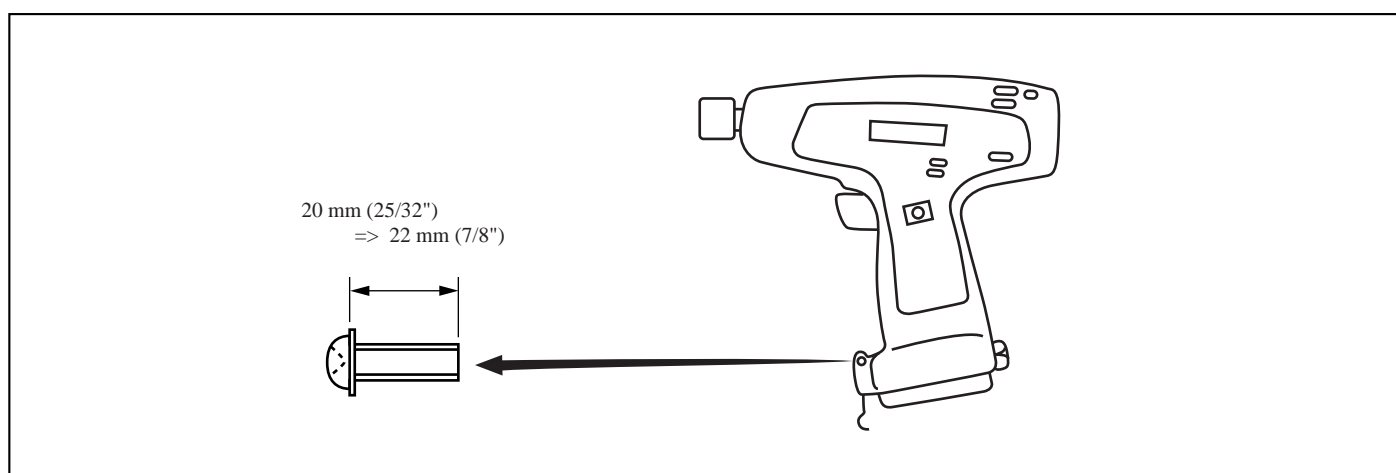

### Interchangeability(I/C)

| Item No. | Current part            |  | Q'ty | I/C | New part                |  | Q'ty | Note |
|----------|-------------------------|--|------|-----|-------------------------|--|------|------|
| 4        | Housing set<br>182423-5 |  | 1    | <=  | Housing set<br>182640-7 |  | 1    |      |
| 3        | Screw M4x20<br>911138-5 |  | 1    | <=  | Screw M4x22<br>911143-2 |  | 1    |      |

### Note

Interchangeability mark: <= mark indicates that the new type parts can be substituted for the current type parts.

### Implementation

6903VD : From serial No. 507420E

6903VDW: From serial No. 26501E