


- Subject** ▶ Changes on HANDLE SET and SCREWS which fasten the handle set
- For Models** ▶ JR3020(Recipro Saw) and 8406C(Diamond Core Hammer Drill)
- Description** ▶ The two parts in the subject have been changed for lower cost as described below;

(1) Screws to fasten handle set (handle L and handle R) have been changed ;
from Pan head screw M4x30
to Tapping screw 4x25

(2) Holes/bosses of handle L/handle R have been changed to accept the tapping screws.

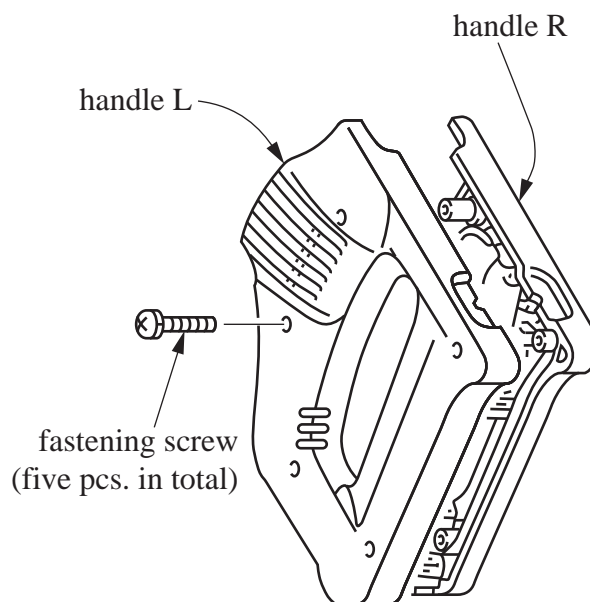

Interchangeability(I/C)

Item No.	Current part		Q'ty	I/C	New part		Q'ty	Note
	Handle set 182578-6		1	No	Handle set 182806-9		1	Interchangeable as a set
	Pan head screw M4x30 911158-9		5	No	Tapping screw Flange 4x25 265999-8		5	

Implementation

JR3020 : From serial No.17597E
8406C : From serial No.3403E