



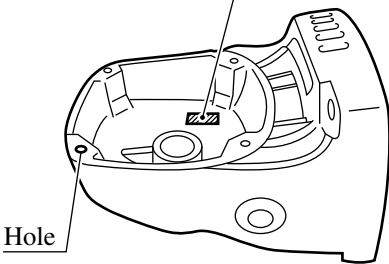

TECHNICAL INFORMATION



58776

- Subject** ▶ Changes on Gear Housing Complete and Screw
- For Models** ▶ 9040L, 9047, 9047L, 9047S, 9049, 9049S, 9057, 9057S, 9059, 9059S
- Country** ▶ All countries
- Description** ▶ As illustrated below, Gear Housing Complete and Screw have been changed for quick repair.

	► Current	► New
Gear Housing Complete	<p>Inscription of "3168530"</p>  <p>Hole</p> <p>(Part No.159907-8)</p>	<p>Inscription of "3173151"</p>  <p>Treatment for Screw M5</p> <p>(Part No.151859-9)</p>
Screw (4pcs.)	 <p>Tapping Screw (Part No.266027-2)</p>	 <p>Pan Head Screw w/spring washer (Part No.911226-8)</p>

Interchangeability(I/C)

Item No.	Current part		Q'ty	I/C	New part		Q'ty	Note
All models: 016	Gear Housing Complete 159907-8		1	No	Gear Housing Complete 151859-9		1	Interchangeable as a set
All models except 9040L: 033 9040L : 031	Tapping Screw Bind CT 5x16 266027-2		4	No	Pan Head Screw M5x18 911226-8		4	

Implementation

All models manufactured in U.K. : To be implemented around Sep, 1999

Machines manufactured in Japan;

9040L : From serial No.3500E

9047 : From serial No.44979E

9047L : From your next order in/after July, 1999

9047S : From serial No. 4137E

9049 : From serial No. 55160E (July, 1999)

9049S : From your next order in/after July, 1999

9057 : From serial No.10794E (July, 1999)

9057S : From your next order in/after July, 1999

9059 : From serial No.34114E (July, 1999)

9059S : From you next order in/after July, 1999