


**Subject** ▶ Change of Slider and Plane Bearing

**For Models** ▶ JR3000V (Recipro Saws)


**Description** ▶

1) Change on Slider : Shape and thickness of slider block have been changed.

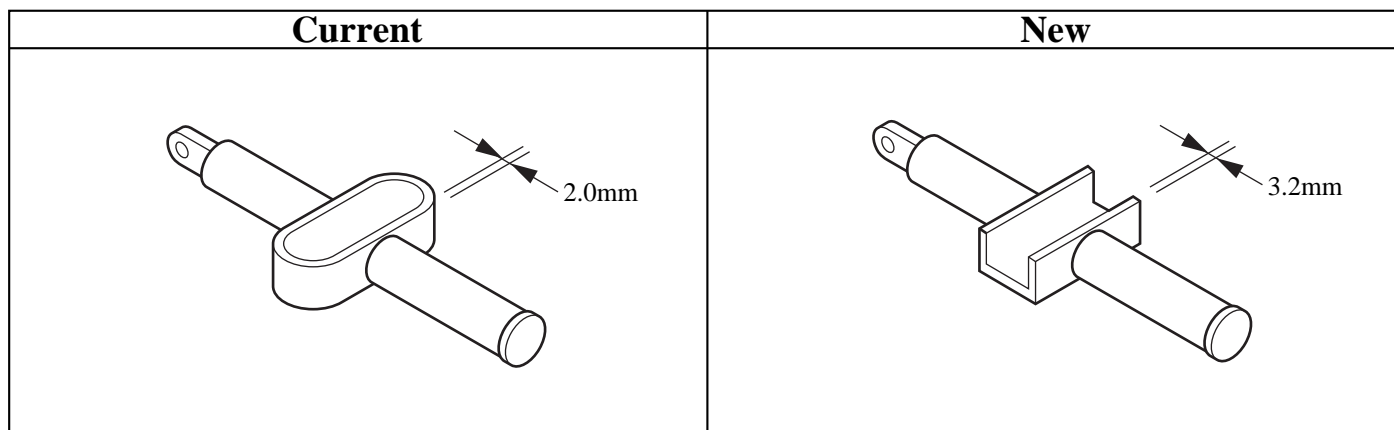

2) Change on Plane Bearing 12.7 : Plane Bearing at moter housing side has been shortened by 1mm to make a clearance for new Slider block.

Current Plane Bearing may be used only at blade side after above change.

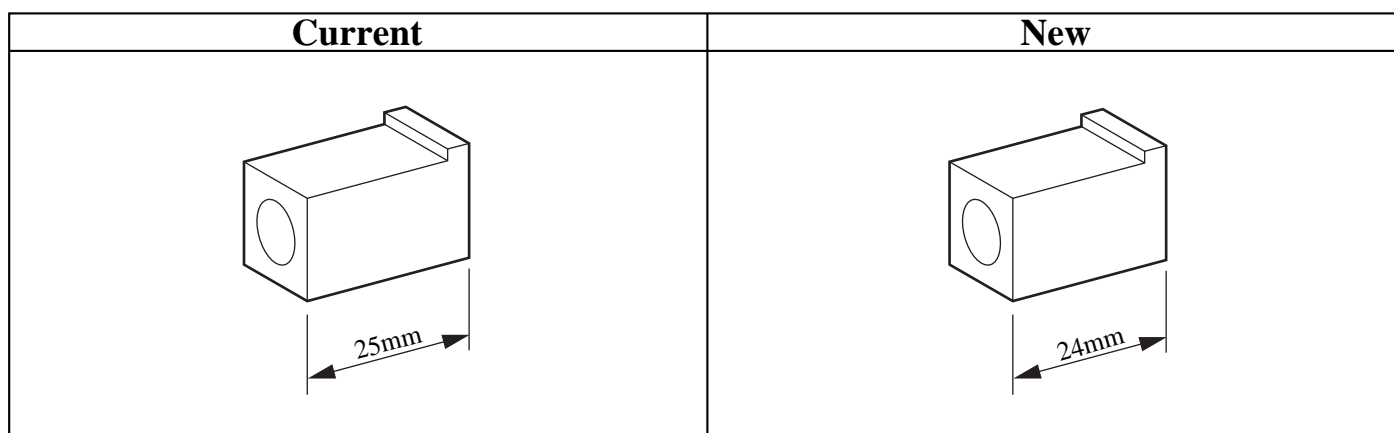

## Interchangeability(I/C)

Item No.	Current part		Q'ty	I/C	New part		Q'ty	Note
008	Slider 163357-1		1	No	Slider 163392-9		1	Interchangeable as a set
005	Plane Bearing 12.7 214157-3		1	<=	Plane Bearing 12.7 214166-2		1	

## Note

Interchangeability mark : <= means the new is substituted for the current.

## Implementation

JR3000V : From serial No. 1630169E (Dec.1996 Production)