

# TECHNICAL INFORMATION



New Tool

**Models No.** ▶ 6211D

**Description** ▶ 10 mm (3/8") Cordless Driver Drill

## CONCEPTION AND MAIN APPLICATIONS

Model 6211D/DW and Model 6311D/DW (described in NT-7/92) are identical except for the chuck capacity.


Model	Chuck Capacity
<b>6211 D/DW</b>	10 mm (3/8")
<b>6311 D/DW</b>	13 mm (1/2")

Model 6211D is sold with a battery cartridge 1200 but without a fast charger.

Model 6211DW includes a battery cartridge 1200 and a fast charger DC 1200.

(Note)

Model 6211DW for USA and Canada includes a fast charger DC1290 instead of DC1200.

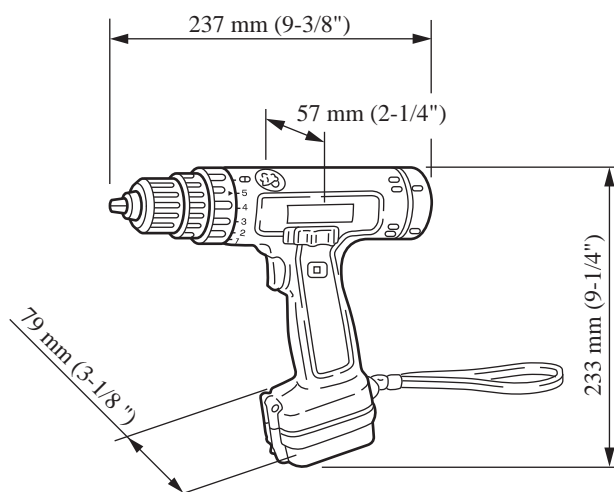

## ► Specifications

		DC Magnet Motor (12 V)
<b>No Load Speed</b>	High	0 - 1,150 R/min
	Low	0 - 370 R/min.
<b>Capacities</b>	Steel	10 mm (3/8")
	wood	21 mm (13/16")
	wood Screws	6.4 mm (1/4") x 55 mm (2-3/16")
	Machine Screws/Nuts	6 mm(1/4")
<b>Max. Fastening Torque</b>	At High Speed	About 65 kg.cm (4.7 ft.lbs)
	At Low Speed	About 210 kg.cm (15.2 ft.lbs)
<b>Net Weight</b>		1.8 kg (3.7lbs)

## ► Standard equipment

Phillips Bit 2-65, Carrying Hook, Plastic Carrying Case (6211DW only)

## ► Optional accessories

Battery Cartridge 1200, Various size of Drill Bits, Various size of Slotted Bits, Various size of Phillips Bits, Various size of Socket Bits, Foam Polishing Pad 125, Wool Bonnet 100, Rubber Pad Assembly, Fast Charger DC1200, Plastic Carrying case

## ► Features and benefits

1. Well-balanced and thin-gripped tool for easy handling
2. Max.fastening torque: 210 kg.cm(15.2 ft.lbs)
3. Keyless drill chuck for fast installation/removal of bit. No chuck key to lose.
4. Convenient carrying hook can be installed on either left or right side of tool.
5. 2-speed gear selection with variable speed control in either range for effective drilling and driving
- 6.12 torque settings; 6 settings in high speed, 6 settings in low speed
7. Reversing feature for screw/bit removal
8. Electric brake stops chuck quickly.
9. Model 6211DW includes plastic carrying case.

The standard equipment for the tools shown may differ form country to country.