


Subject ▶ Change on base, strain relief, etc.

For Models ▶ 2708 (Table Saw)

Description ▶

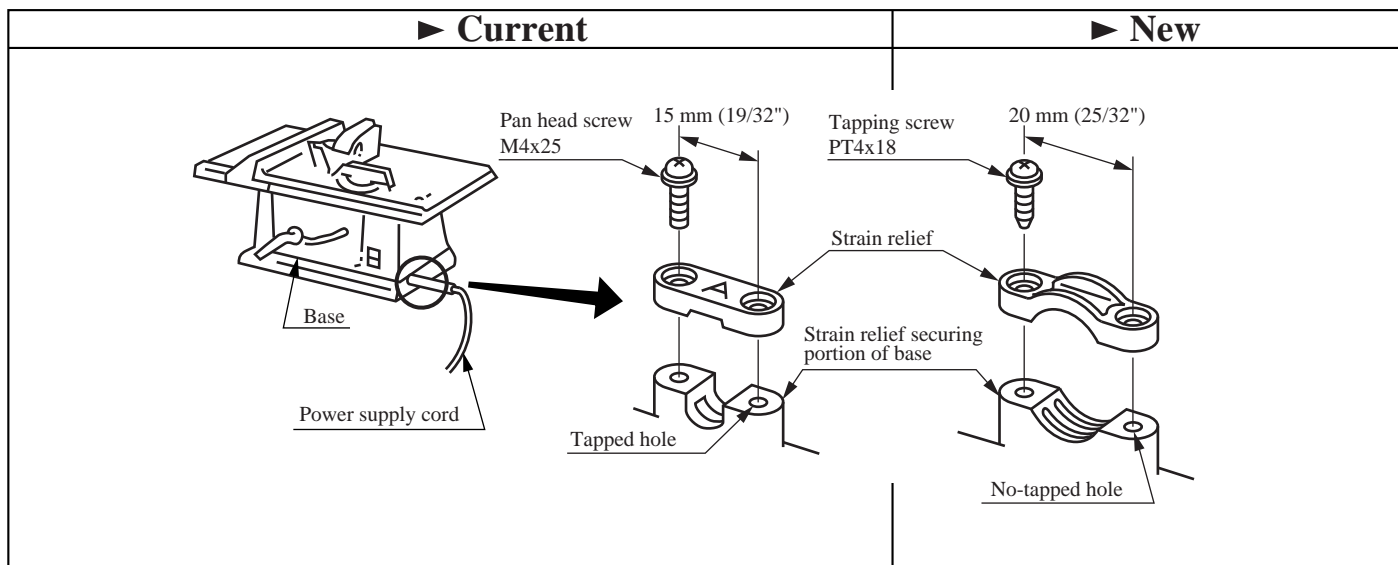

1. Base

*The pitch between the screw holes for securing the strain relief will be changed from 15 mm (19/32") to 20 mm (25/32").


*The screw holes will be changed from tapped holes 4 mm (5/32") in dia. to non-tapped holes 3.25 mm (1/8") in dia.

2. Screw for securing the strain relief

The pan head screws M4x25 will be changed to tapping screws PT4x18.

3. Strain relief

The pitch between the screw holes will be changed from 15 mm (19/32") to 20 mm (25/32").

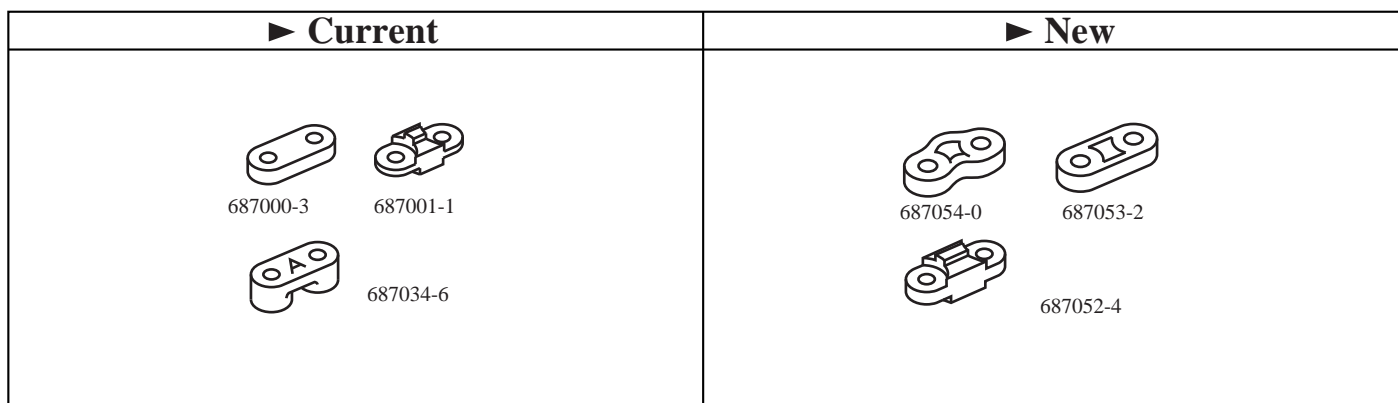

Interchangeability(I/C)

Item No	Current part		Q'ty	I/C	New part		Q'ty	Note
73	Base 155633-7		1	No	Base assembly (with cap 20) 134737-8		1	See the note 1 below.
73	Base 155815-1		1	No	Base assembly (with cap 20) 134738-6		1	See the notes 1 & 2 below.
73	Base 155817-7		1	No	Base assembly (with cap 20) 134740-9		1	See the notes 1 & 4 below.
75	Pan head screw M4x25 911148-2		2	No	Tapping screw PT4x18 265995-6		2	See the note 1 below.
74	Strain relief 687034-6		1	No	Strain relief 687054-0		1	See the notes 1 & 5 below.
74	Strain relief 687000-3		1	No	Strain relief 687054-0		1	See the notes 1 & 6 below.
74	Strain relief 687001-1		1	No	Strain relief 687053-2		1	See the notes 1 & 7 below.
74	Strain relief 687000-3		1	No	Strain relief 687053-2		1	See the notes 1 & 8 below.
74	Strain relief 687001-1		1	No	Strain relief 687052-4		1	See the notes 1 & 9 below.

Note

1. The current type parts (base, pan head screw and strain relief) and the new type parts (base, tapping screw and strain relief) are interchangeable as a set.
2. For U.K., Netherlands, Italy and Sweden
3. For France, Reunion and Algeria
4. For Austria and Germany
5. For Singapore, Thailand, Taiwan, Indonesia, etc.
6. For Austria, Papua New Guinea, etc.
7. For Spain, Italy, New Zealand, etc.
8. For Saudi Arabia (127 V), Guam, Venezuela, U.K. (110 V), etc.
9. For Germany, Netherlands, Sweden, U.K. (240 V), etc.

Implementation

From serial No. 483954E