

# T ECHNICAL INFORMATION

**Makita**

New Tool

**Models No.** ▶ 6891D

**Description** ▶ Cordless screw driver

## CONCEPTION AND MAIN APPLICATIONS

Model 6891D/6891DW are screw drivers with 9000 batteries used only for dry walls.

Each of them has a variable speed switch with a brake.


Model 6891DW consists of :

6891D (Battery screw driver for boards)

DC9100 (Quick charger)

Battery 9000

The battery and the charger are not attached to Model 6891D.

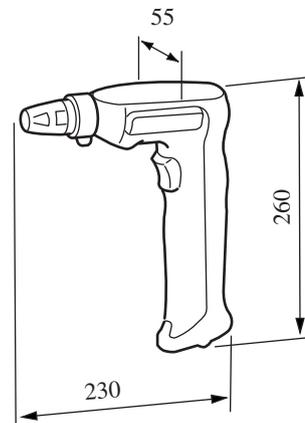

### ▶ Specifications

Motor	DC 9.6 V magnet motor
No load speed	0-1400/min
Hexagon shaft	6.35mm (across flats)
Dry wall screw	4mm
Net weight	1.3 kg

### ▶ Standard equipment

Magnet connecting bit 6.35-60 : 1

Bit 2-25 : 1

Steel portable case only for 6891DW

### ▶ Optional accessories


Battery 9000

Magnetic connecting bit 6.35-60

Bit 2-25

12V quick charger DC9012 (for charging from the car cigarette lighter socket)

Hatching part is narrowed

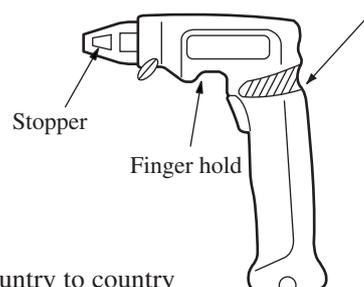

The standard equipment for the tools shown may differ from country to country

## ► Features and benefits

- (1) Stopper allows you to tighten screws to any depth. The stopper can be adjusted easily with its screw for fine control.
- (2) Dust-proof ring rotates with the bit to prevent dust from going into the machine.
- (3) Brake to stop the rotation instantly enables you to attach screws to the bit soon during your continuous operation.
- (4) Magnetic connecting bit prevents screws from falling off.
- (5) Over-current relay (automatic-reset type) protects the motor and the switch.
- (6) Finger hold over the switch and the neck on the joint of the handle allow you to hold the machine in balance and operate the switch smoothly.

## ► Repair

- (1) Before placing the gear complete in the housing, attach the dust-proof ring on the tip of the gear.
- (2) Grease the front part of the ball bearing  
(to protect the bearing from dust coming into the without being eliminated by the dust-proof ring).

