

T ECHNICAL INFORMATION

New Tool

For Models ▶ 3612C


Description ▶ 12mm(1/2") Electronic Router
(Plung type)

CONCEPTION AND MAIN APPLICATIONS

Model 3612C is an improved version of the existing Model 3612BR. You can do your work more efficiently because this router is more powerful and has electronic speed control, variable speed, electric brake and soft start features.

(Note)

This router is offered to all countries and areas except England, France, Italy, Netherlands, Belgium, Germany, Austria, Spain, Switzerland, Norway, Sweden, and Finland.

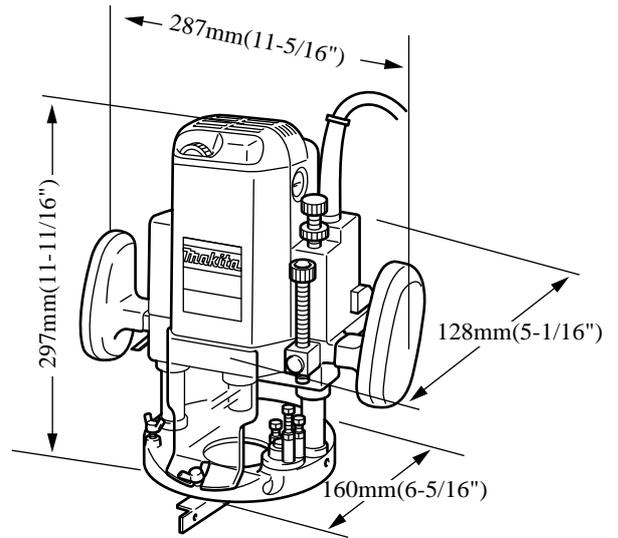

► Specifications

Voltage (V)	Current(A)	Cycle(Hz)	Continuous Rating(W)		Max. output(W)
			Input	Output	
100	15.0	50/60	1,430	1,000	2,600
115	15.0	50/60	1,650	1,000	2,600
200	7.5	50/60	1,430	1,000	2,600
220	8.9	50/60	1,850	1,400	3,400
230	8.5	50/60	1,850	1,400	3,400
240	8.1	50/60	1,850	1,400	3,400

Collet Capacity	12mm or 1/2"
No Load Speed	9,000-23,000R/min
Plunge Capacity	0-60mm (2-3/8")
Base Diameter	160mm (6-1/4")
Net Weight	6.0kg (13.2lbs)

► Standard equipment

- Straight Guide
- Guide Holder Assembly
- Collet Sleeve (6mm or 1/4")
- Collet Sleeve (8mm or 3/8")
- Wrench 24, 8
- Straight Bit

► Optional accesories

- Various types of Router Bits
- Various sizes of Templet Guide
- Trimmer Guide Assembly
- Templet Guide Adapter 30
- Various sizes of Collet Sleeve
- Vacuum Head Set
- Router Stand

► Features and benefits

1. Double insulated for operator safety.
2. See below for more information.

Dial for electronic speed control and variable speed setting.

- *Electronic control for constant speed at any (variable rpm) setting
- *Variable speed lets you select right rpm in terms of bits and material.

Switch with soft start and brake.

- *Soft start means reduced tool reaction after switch-on for easier use.
- *Electric brake stops the bit quickly. This allows you to move on to the next job faster.

