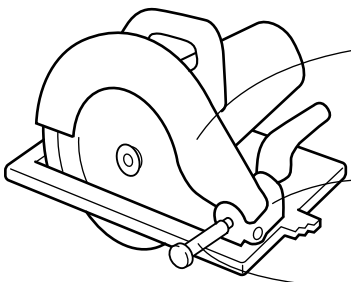
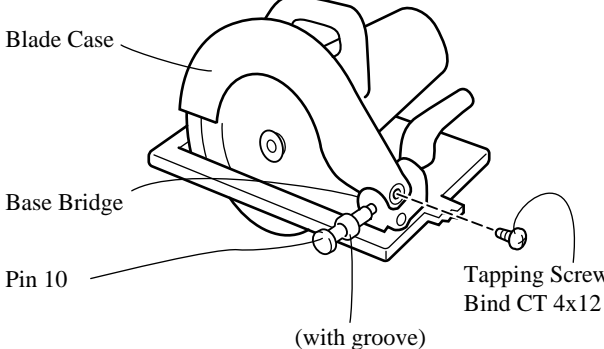
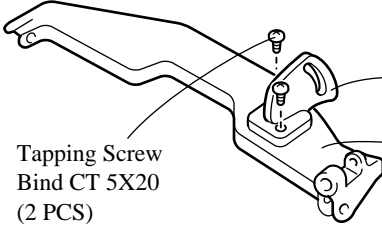
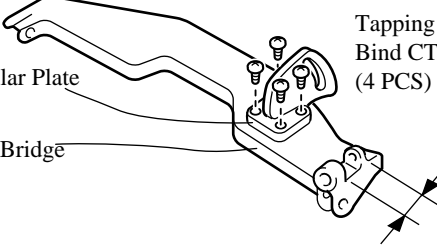
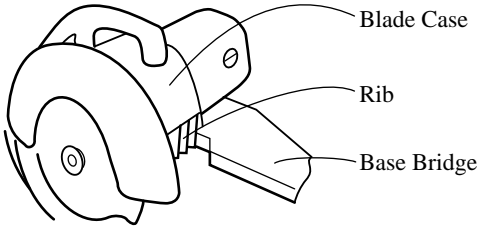


- Subject** ▶ Changes on blade case, etc.
- For Models** ▶ 5143R(355mm Circular Saw)
- Note** ▶ This information applies to European countries.
- Description** ▶ As described below, six parts have been changed for less rickety.

	CURRENT	NEW
Tapping Screw Bind CT 4X12		 Blade Case and Pin 10 are fixed by tapping screw, so that they become less rickety.
Pin 10		Tolerance is changed to make the gap between Pin 10 and Base Bridge narrower.
Tapping Screw Bind CT 5X20		 Number of tapping screws fixing Base Bridge and Angular Plate ; 2 => 4
Base Bridge		Make the gap between Base bridge and Blade Case narrower.
Blade Case		Rib which contacts with Base Bridge is added to Blade Case. 

Interchangeability(I/C)

Item No.	Current part		Q'ty	I/C	New part		Q'ty	Note
51	Blade Case Complete 152497-0		1	<=	Blade Case Complete 152546-3		1	The current can be used for 5103R Interchangeable as a set
60	Pin 10 268008-2		1	<=	Pin 10 268018-9		1	
55					Tapping Screw CT4x12 266026-4		1	
93	Angular Plate 316746-1		1	<=	Angular Plate 316879-2		1	The new is fixed with two screws when either of the currents is replaced.
101	Base Bridge 316750-0		1	<=	Base Bridge 316880-7		1	
69	Tapping Screw Bind CT5x20 266036-1		2	Yes	Tapping Screw CT5x20 266036-1		4	

Note

Interchangeability mark ; <= means that the new part can be substituted for the current.

Implementation

5143R : From serial No.6324E