


**For Models** ▶ 5903R

**Description** ▶ 235 mm (9-1/4") Circular Saw

## CONCEPTION AND MAIN APPLICATIONS

Model 5903R is a redesigned version of the existing Model 5900BR. Model 5903R is equipped with rivingknife, electric brake, more powerful Makita motor, more efficient chip/sawdust ejection port, extremely durable aluminum base, Standard. etc. It complies with CENELEC

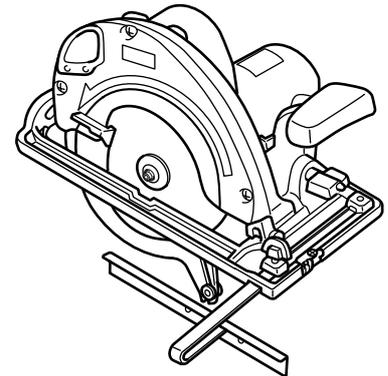

### ▶ Specifications

Voltage (V)	Current (A)	Cycle (Hz)	Continuous Rating (W)		Max. Output(W)
			Input	Output	
100	15.0	50/60	1,430	650	2,300
115	15.0	50/60	1,550	700	2,300
200	10.5	50/60	2,000	1,200	3,200
220	9.6	50/60	2,000	1,200	3,200
230	9.2	50/60	2,000	1,200	3,200
240	8.8	50/60	2,000	1,200	3,200

<b>Blade Diameter</b>	235 mm (9-1/4")	
<b>Arbor Diameter</b>	30 mm (1-3/16")	
<b>Max. Cutting Capacities</b>	At 90°	85 mm (3-11/32")
	At 45°	64 mm (2-1/2")
<b>No Load Speed</b>	4,500 R/min.	
<b>Net Weight</b>	7.6 kg (16.7 lbs)	
<b>Power supply cord</b>	2.5m (8.2ft)	

### ▶ Standard equipment

Carbide-tipped Saw Blade 235-20, Hex Wrench 6, Rip Fence (Guide Rule)



### ▶ Optional accessories

Joint Set (for connecting to the vacuum cleaner), Inner Flange 42 (for saw blade with 25 mm; 63/64" arbor diameter)

### ▶ Features and benefits

1. Double insulated
2. Refer to the attached sheet for more information.

The standard equipment for the tools shown may differ from country to country

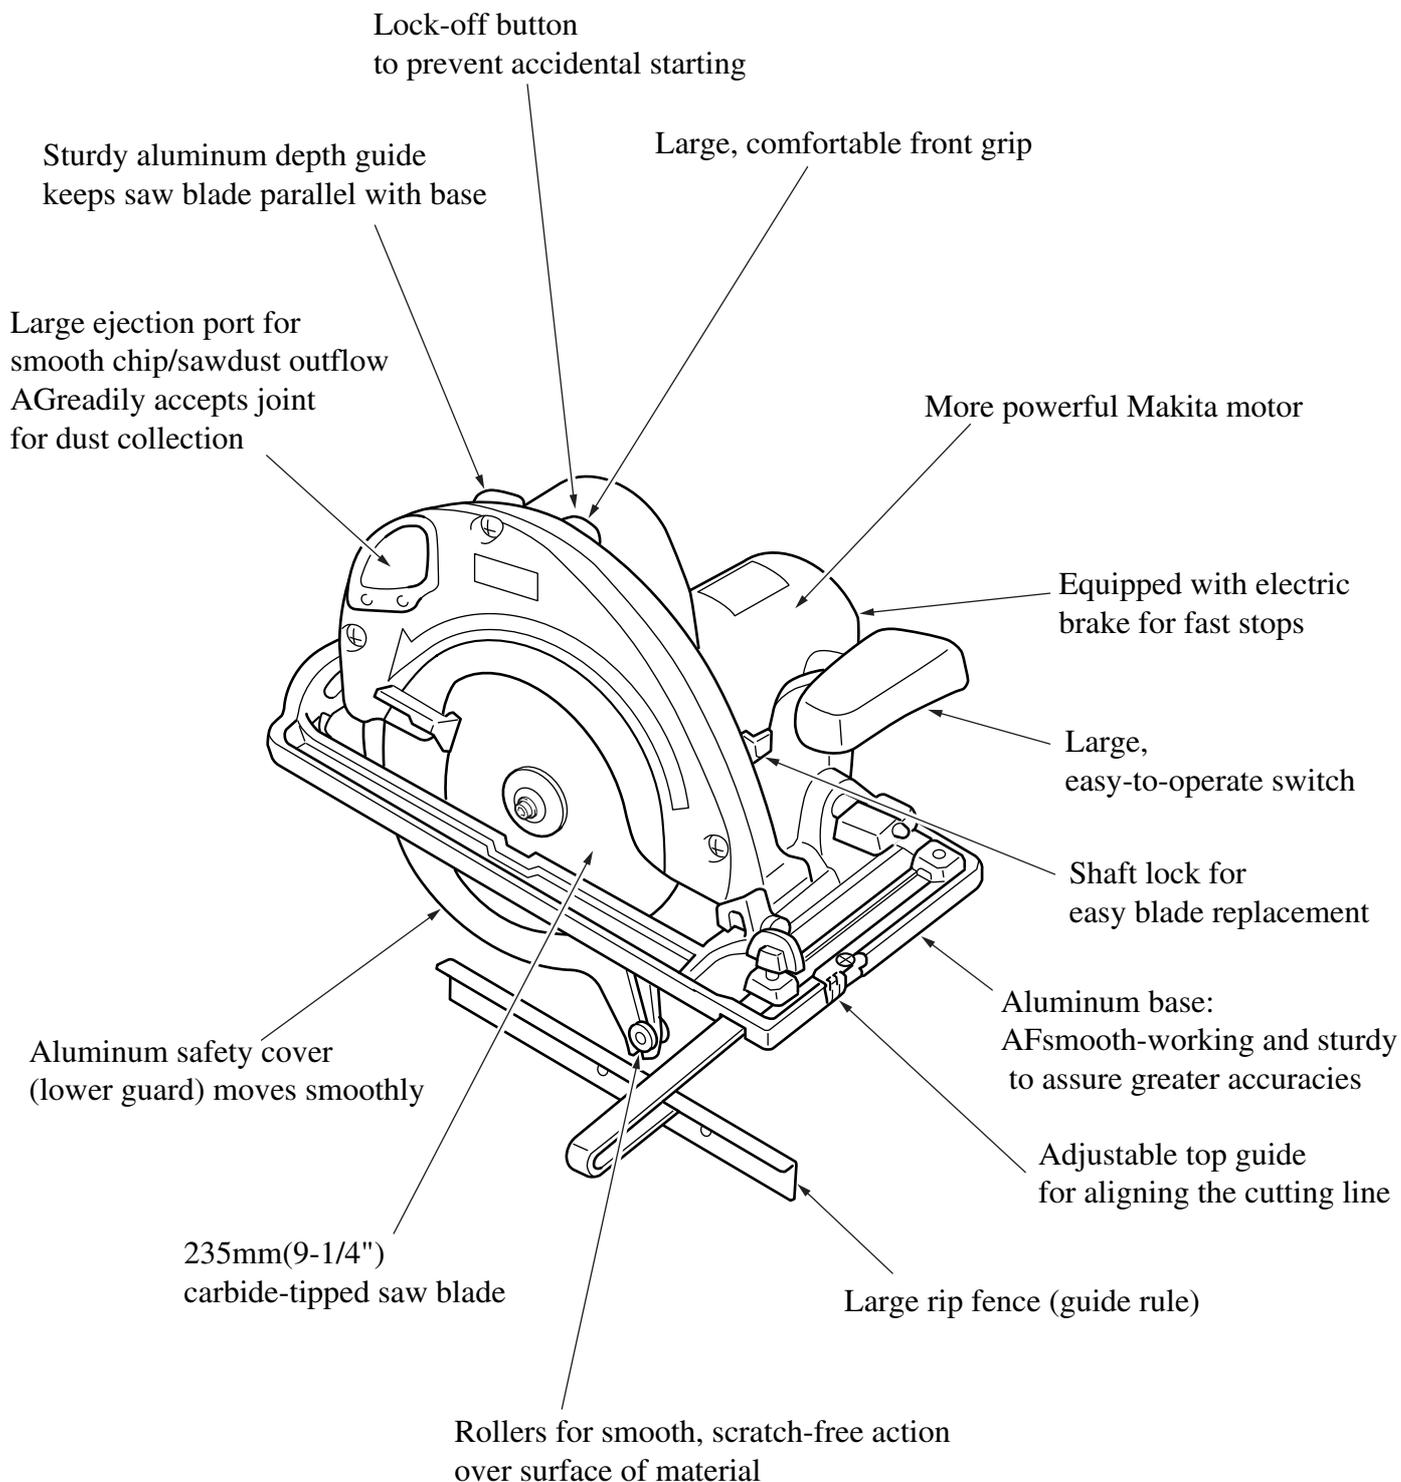

Large and easy-to-operate lever for adjusting the depth of cut