


**For Models** ▶ DC1412**Description** ▶ Fast Automotive Charger

## CONCEPTION AND MAIN APPLICATIONS

This fast automotive charger, which power source is the inlet of the cigarette lighter in the car, can accept DC 7.2V, 9.6V, 12V and 14.4V Ni-Cd batteries.

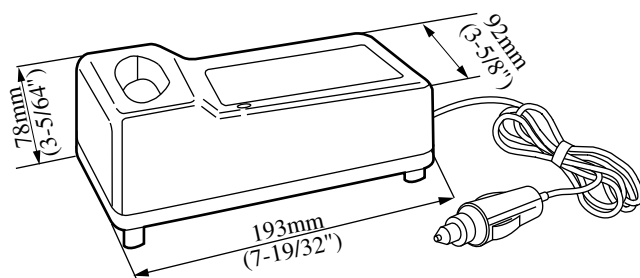

### ► Specifications

Voltage(V)	Input
12-24V	50W

### ► Capacity

Output voltage : DC7.2V, 9.6V, 12V, 14.4V

Output current : DC1.8A

Charging time : 45min. for 1.3Ah battery (Battery 7000, 7100, 9000, 9100, 9100A, 9120, 1200, 1200A, 1210)

60min. for 1.7Ah battery (Battery 7001, 9001, 9101, 9101A, 1201, 1201A, 1211)

70min. for 2.0Ah battery (Battery 7002, 9002, 9102, 9102A, 9122, 1202, 1202A, 12020A, 1422)

Net weight : 0.53Kg (1.17lbs)

Cord length : 2.0m (6.6ft)


## ► Repair

The delivery of charging circuit of DC1410/LG123 for repair has been stopped because of starting production of DC1411/LG124 and the charging circuit of DC1411/LG124 is to be used for replacement. Note that you should remove one charging terminal as shown in the figure below when replacing a charging circuit of DC1410/LG123.

Can be used for both 12V and 24V power source  
Charging time is the same with 12V and 24V power source.

Automatic charging of heated battery after use

You may leave heated battery, after coolen-down, it automatically starts charging.  
(the same as DC1410)

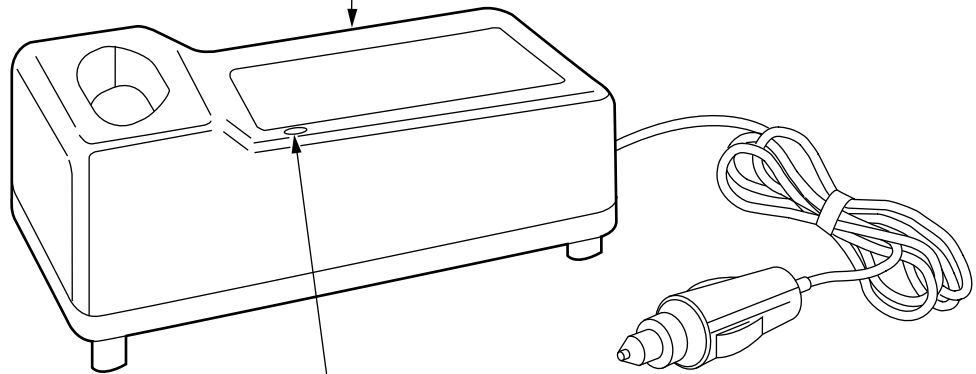

Charging condition is displayed by green or red light.

(the same as DC1410)

High capacity battery can be charged.

1. 3Ah battery(nomal capacity)  
Charging time : 45min.
1. 7Ah battery(high capacity)  
Charging time : 60min.
2. 0Ah battery(high capacity)  
Charging time : 70min.