

Model No. ▶ BAP24

Description ▶ 24V Battery adapter

P 1 / 3


CONCEPT AND MAIN APPLICATIONS

The above adapter has been developed for easy holding of 24V cordless tools.

The carry hook on battery holder has facilitated transportation of tools.



▶ Features and benefits

Facilitates to hold 24V cordless tools.

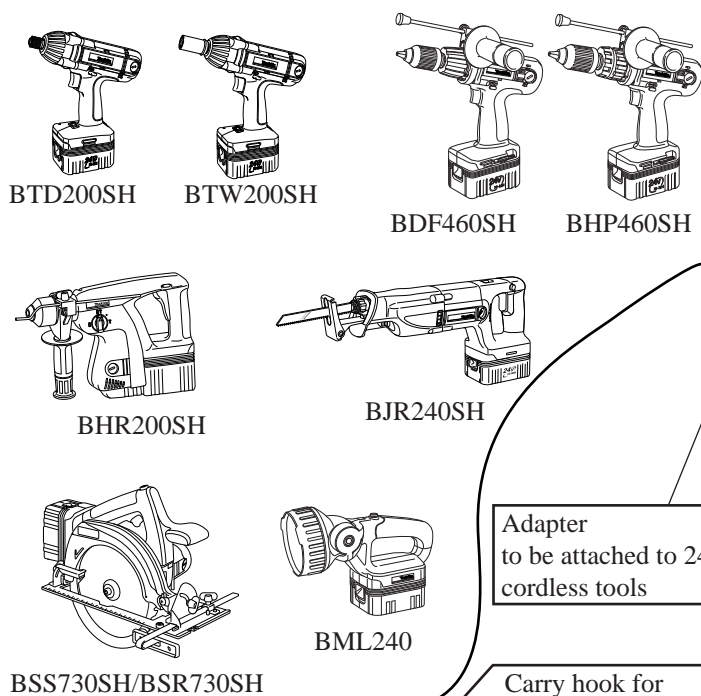

Adapter to be attached to 24V cordless tools

Carry hook for easy transportation

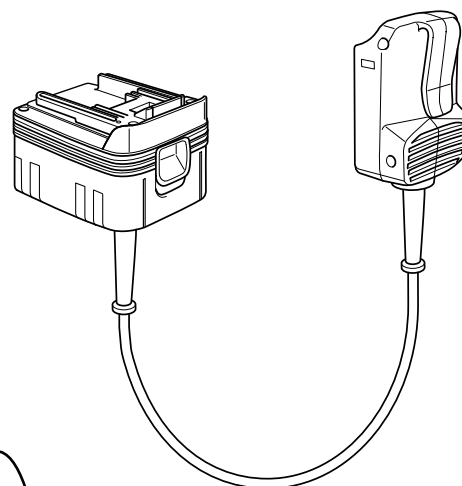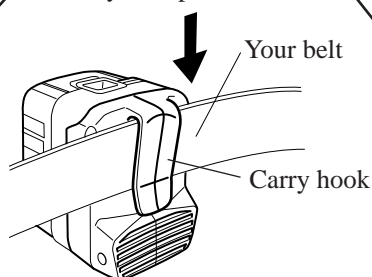

24V Battery

Battery holder


Cord of 1.5m (4.9ft)

< 1 > Disassembling cases of adapter and battery holder

- (1) Separate adapter case cover from adapter case as illustrated in Fig. 1.
- (2) Case R from Case L as illustrated in Fig. 1.

< Note in disassembling >

Employ No.1R277 "Hex robe driver T-10", when unscrewing the screws in Fig. 1.



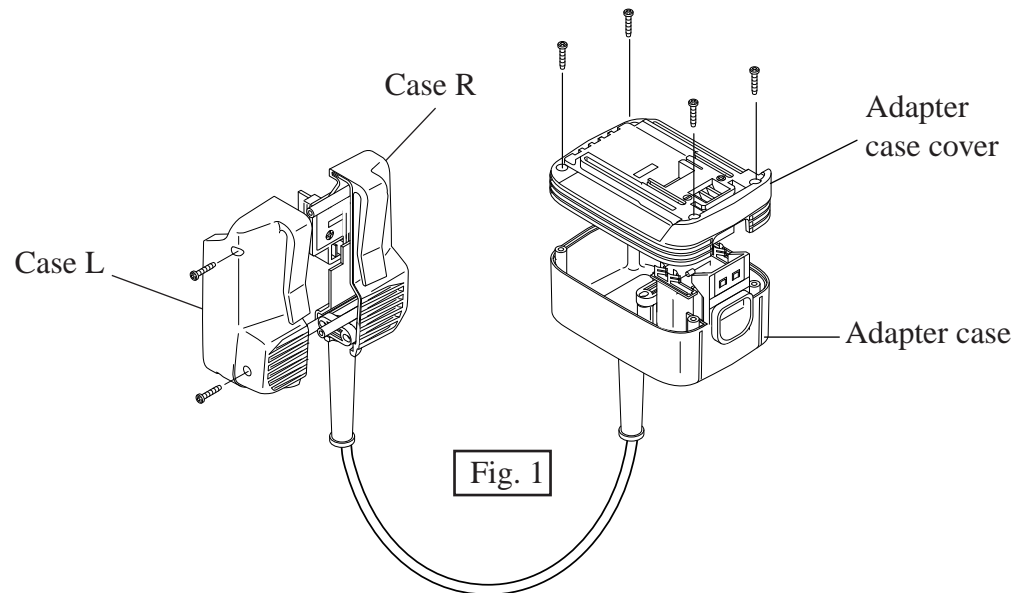


< 2 > Connecting cord with terminal board of adapter

- (1) Pass lead wire (brown) and (blue) from the under case side to terminal board. Connect lead wire (blue) to minus terminal and connect the same (brown) to plus terminal. See Fig. 2A.

Inflect the wires to the hook side.
And solder them to the terminal.

<Note> The inflected portion does not have to protrude from terminal board.

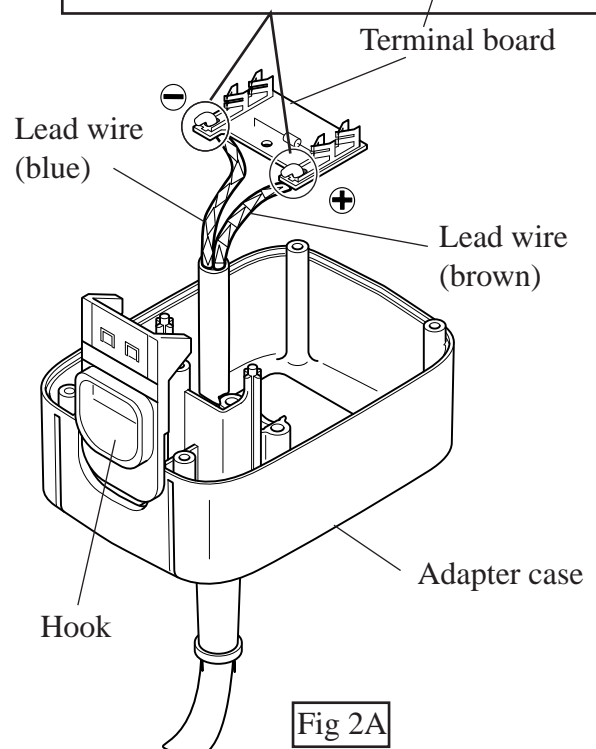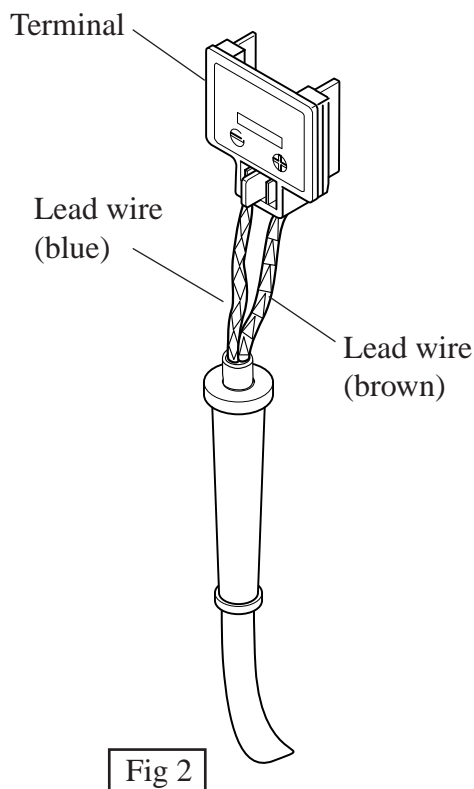

► Repair

< 2 > Replacing cord

Do not apply other cord. Always use the genuine cord for BAP24.

< Note in charging >

It is impossible to charge the battery through adapter. Insert the battery directly into charger.

