

# TECHNICAL INFORMATION




62804

**Subject** ▶ Change of Pad 150

**For Models** ▶ BO6030, BO6040

**Country** ▶ All countries

**Description** ▶ To enhance the durability of Pad 150, the density of urethane sponge has been increased.  
A line has been added on the hub of the new Pad 150 to distinguish the new Pad 150 from the current one as illustrated below.

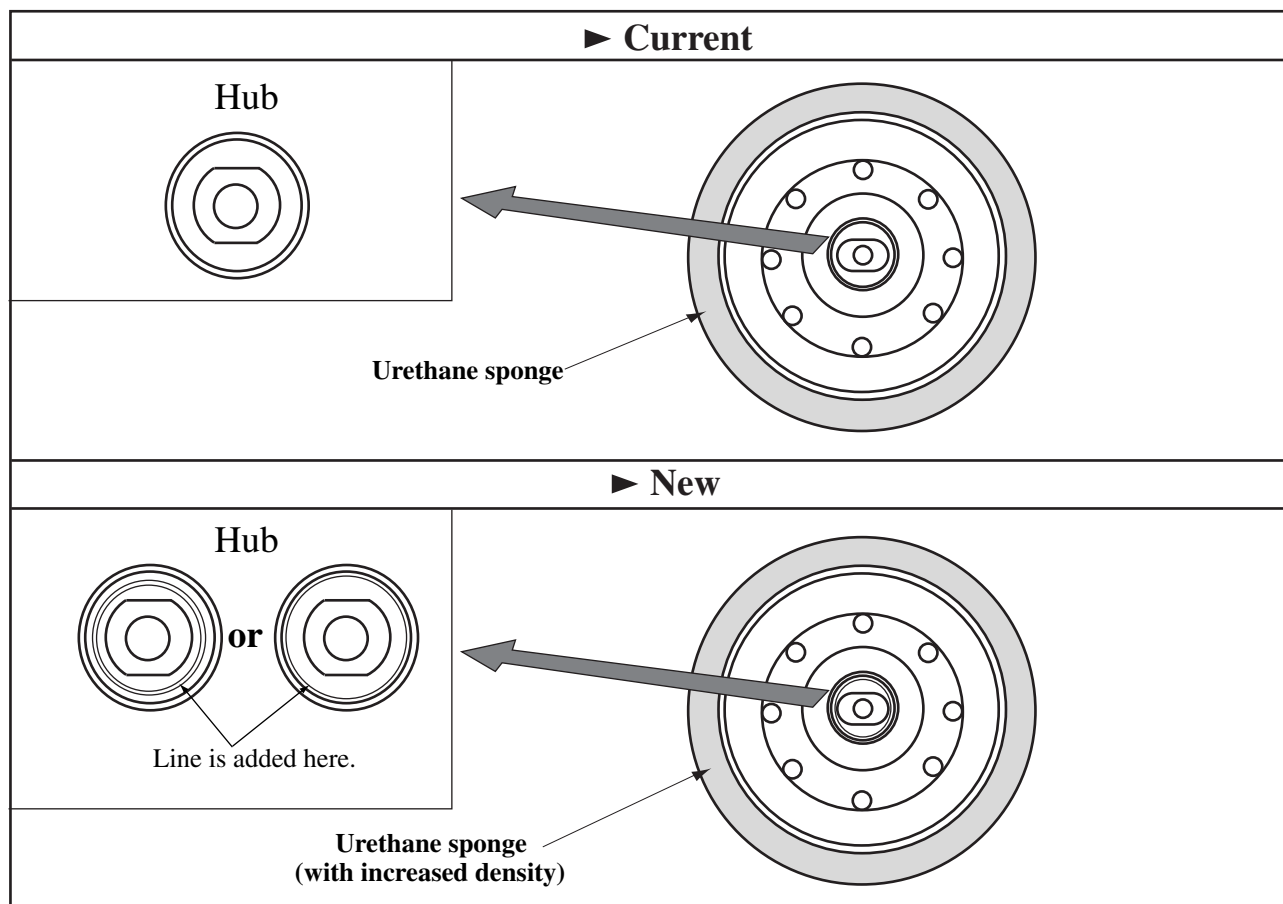

## Interchangeability(I/C)

**All countries except for Canada, Guam, U.S.A., Panama**

Item No.	Current part		Q'ty	I/C	New part		Q'ty	Note
BO6030 : 046	Pad 150		1	←	Pad 150 (Soft)		1	Use the current pad 150 in your stock as a replacement part for BO6040. Do not use it for BO6030.
BO6040 : 033	743063-0				193299-5			
BO6030 : F12	Pad 150 (Soft)		1	←	Pad 150 (Soft)		1	
BO6040 : F03	794605-3				193299-5			

**Canada, Guam, U.S.A., Panama**

Item No.	Current part		Q'ty	I/C	New part		Q'ty	Note
BO6030 : 046	Pad 150		1	←	Pad 150 (Soft)		1	Use the current pad 150 in your stock as a replacement part for BO6040. Do not use it for BO6030.
BO6040 : 033	743063-0				193286-4			

## Note

Interchangeability mark ; ← means that the new part is substituted for the current.

## Implementation

BO6030 : From initial order

BO6040 : From serial No.6410E (Jan., 2001)