



# TECHNICAL INFORMATION



67341

- Subject** ▶ Change of Lock Plate for Change Lever
- For Models** ▶ DA4031
- Country** ▶ All countries
- Description** ▶ Lock Plate for Change Lever has been replaced by Retaining Ring.  
See below for the details.

▶ Current	▶ New
 Lock Plate (345190-5)	 Retaining Ring S-18 (961078-7)

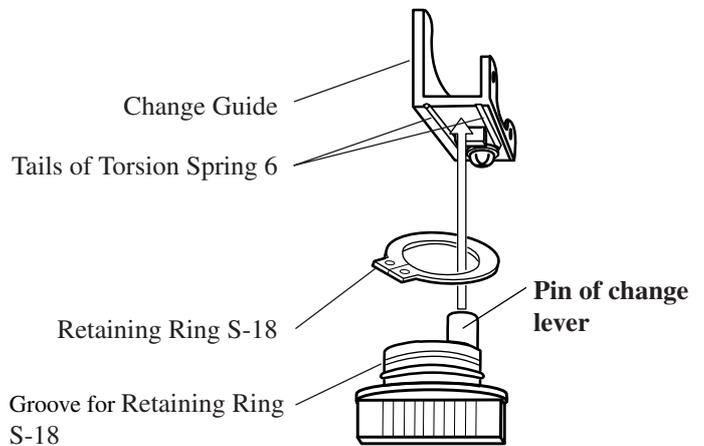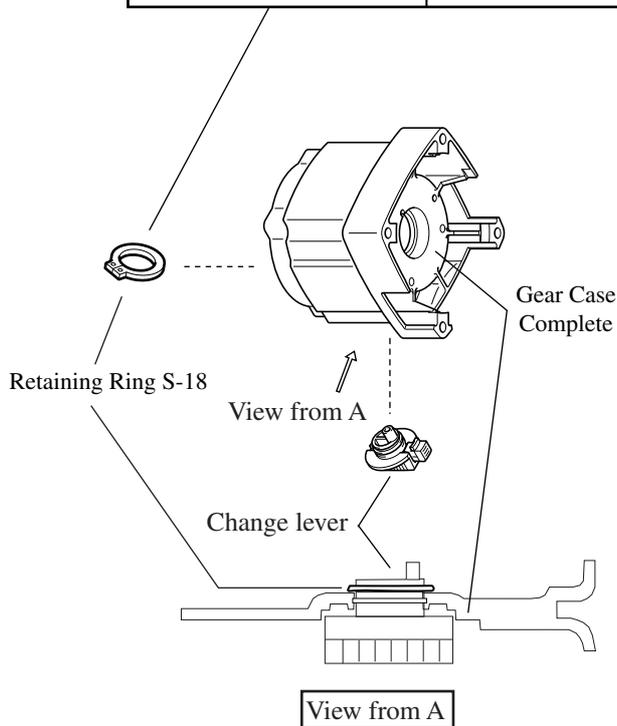

< Note on assembling >

- 1, Insert Change Lever so that its Pin can be installed between the tails of Torsion Spring 6 through inside of the Retaining Ring S-18 as illustrated above.
- 2, Attach Retaining Ring S-18 to the groove of the Change Lever with retaining ring pliers. See the illustration to the left.

## Interchangeability(I/C)

Item No.	Current part	Q'ty	I/C	New part	Q'ty	Note
040	Lock Plate 345190-5	1	←	Retaining Ring S-18 961078-7	1	

### Interchangeability mark ;

The arrow ← means that the new part is substituted for the current.

## Implementation

From December 2002 production