






TECHNICAL INFORMATION



67367

- Subject** ▶ Change of Pan Head Screws
- For Models** ▶ DA4030, DA4031
- Country** ▶ All countries
- Description** ▶ Pan Head Screws have been replaced by Hex. Socket Head Bolts with adhesive.

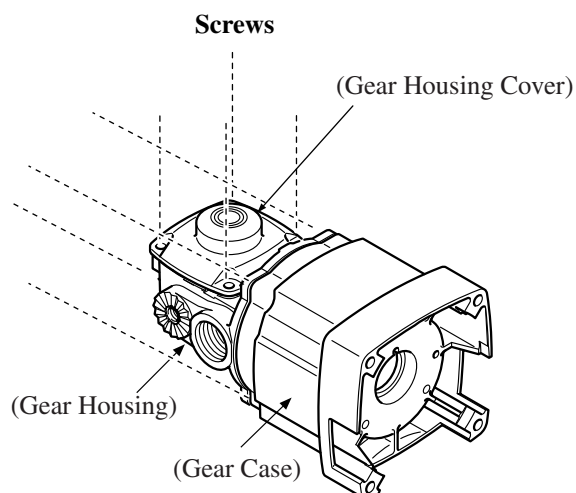

► Current	► New
Pan Head Screw M5x16   (911223-4)	Hex. Socket Head Bolt M5x16   Adhesive (266086-6)

Note:
Fasten Hex. Socket Head Bolt M5x16 at 2.9 - 4.9 N.m
(30 - 50 kgf.cm) torque.

Interchangeability(I/C)

Item No.	Current part		Q'ty	I/C	New part		Q'ty	Note
003	Pan Head Screw M5x16		8	←	Hex. Socket Head Bolt M5x16		8	
005	911223-4				266086-6			

Interchangeability mark ;

The arrow ← means that the new part can be substituted for the current.

Implementation

DA4030: To be informed later

DA4031: From December, 2002 production