

T ECHNICAL INFORMATION



New Tool


Models No. ▶ HM1100C

Description ▶ Demolition Hammers

CONCEPTION AND MAIN APPLICATIONS

Model HM1100C is the hammer classed between Model HM0810 and Model HM1200, and it's brief benefits are;

- *Less vibration toward hands than competitor's same class hammers by improved over all design
- *Reduced operator' s fatigue in cotinuous operation by ergonomically designed large handle, well balanced side handle and slide switch
- *Easy operation for light hammering by electronical speed adjusting dial at lower blows per minute position
- *Adapted for SDS-max type bit Model HM1100 is the model without electronical) speed control feature.

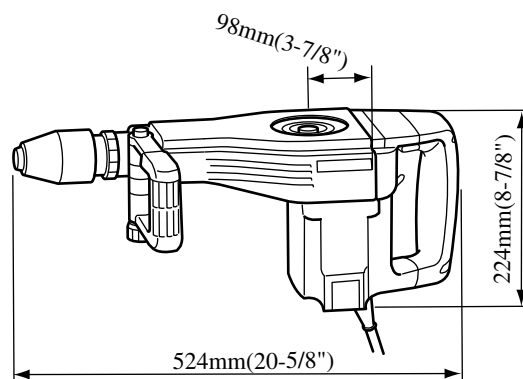

► Specifications

Voltage (V)	Current (A)	Cycle (Hz)	Continuous Rating (W)		Max. Output(W)
			Input	Output	
100	11	50/60	1050	450	1050
115	9.6	50/60	1050	450	1050
200	5.5	50/60	1050	450	1050
220	5	50/60	1050	450	1050
230	4.8	50/60	1050	450	1050
240	4.6	50/60	1050	450	1050

Bit-type		SDS-max
Blows per minute	HM1100C	1300-2650(bpm)
	HM1100	2650(bpm)
Net Weight		6.1Kg(13.5lbs)
Cold Length		5m(16.4ft)

► Standard equipment

Bit Grease Plastic Carrying Case

► Optional accessories

Hammer Grease


► Features and benefits

- 1.Double insulated
- 2.See the attached sheets for more information.

The standard equipment for the tools shown may differ form country to country

Chisel or Spade can be set at 16 different angles.

Bit angle can be changed with bit in tool holder by pushing change ring and turning it.

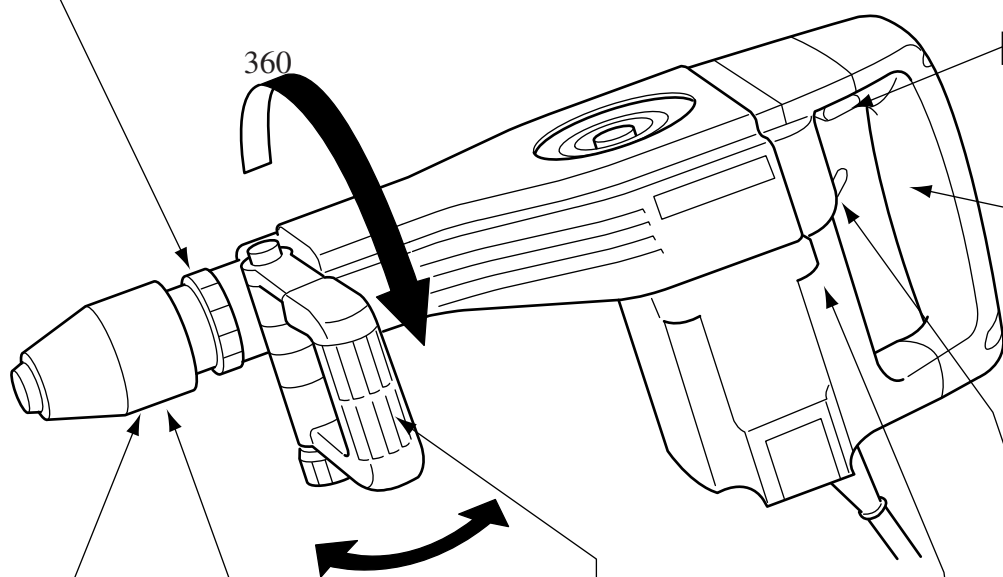

On-off slide switch
suitable for
continuous use

Large handle

- . Ergonomic shape
- . Switch is removed.
- . Large enough for both hands at stright-down work
- . Roundish shape for supporting tool by other part of the body without pain

Speed adjusting dial
(HM1100C only)

Light hammering is easily performed by setting at low blows per minute.

Steady speed + Soft start
(HM1100C only)

Easy to locate bit by
electronical speed control

No hammering when idling

Bit does not jump arround.
Efficiency and endurance
are improved.

D-Side handle

Can be set at any angle
and swiveled at 8 positions
back and forth

Ergonomic body shape

Body can be held
without side handle.

Bit can be installed or removed
by sliding tool holder cover.