

# TECHNICAL INFORMATION



New Tool

Models No. ▶ HM1200


Description ▶ Demolition hammer

## CONCEPTION AND MAIN APPLICATIONS

HM1200 is a sister model of HM1201 and it has a double insulated structure.

HM1200 is an article for export only.

Driving shank is Hexagonal type 21mm.

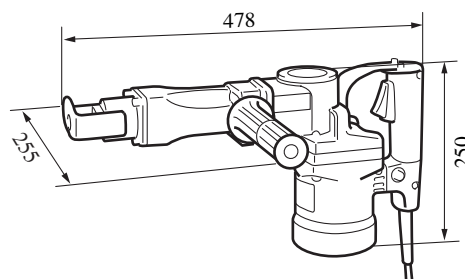

## ► Specifications

Voltage (V)	Current (A)	Cycle (Hz)	Continuous Rating (W)		Max. Output(W)
			Input	Output	
100	12	50/60	1130	600	800
115	8.7	50/60	940	540	800
200	5	50/60	940	540	800
220	4.5	50/60	940	540	800
230	4.3	50/60	940	540	800
240	4.1	50/60	940	540	800

<b>Blows per minute</b>	2000/min
<b>Overall length</b>	480mm (18-7/8")
<b>Net weight</b>	8.3kg (18.3lbs)
<b>Power supply cord</b>	5m (16.4ft)

## ► Standard equipment

Bull point (21x320), Hex. wrench 4,5,6 (one for each), steel case, lock nut wrench, hammer grease (30g)

## ► Optional accessories

Same as #8900S and HM1201.