

# T ECHNICAL INFORMATION




Product

**Models No.** ▶ HM1500B

**Description** ▶ Demolition Hammer

## CONCEPTION AND MAIN APPLICATIONS

Model HM1500 is basically the same as the existing models HM1500 except the bit retaining portion.  
HM1500B accepts 28.6mm(1-1/8") hex shank bits for Pneumatic Breaker.

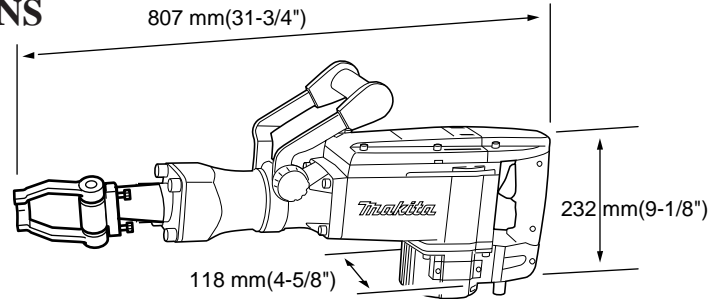

## ► Specifications

Voltage(V)	Current(A)	Cycle (Hz)	Consumed power(W)	Rated output(W)	Max. output(W)
100	15.5	50/60	1470	820	1540
115	13.5	50/60	1470	820	1540
200	7.7	50/60	1470	820	1540
220	7.0	50/60	1470	820	1540
230	6.7	50/60	1470	820	1540
240	6.4	50/60	1470	820	1540

<b>Blows per Minute</b>	1300
<b>Net weight</b>	19.0kg(41.9lbs)

## ► Standard equipment

Hex Wrenches 5,6,10  
Steel Carring Case

## ► Optional accessories

Hammer Grease

## ► Features and benefits

1. Accepts 28.6mm(1-1/8") hex shank bits for Pneumatic Breaker.
2. Demolition capacity is about 30% higher than that of existing Model HM1300.
3. Shock absorbing handles reduce operator fatigue.
4. Side handle swings 360°  
Antivibration handles to reduce operator fatigue.
5. Cushion ring(rubber) between motor housing and brush holder lessens vibration of brush holder and prevents brakage of ring terminal.
6. Greese packed
7. Automatic cut off brushes
8. Double insulated for operator safety

The standard equipment for the tools shown may differ form country to country.