

T ECHNICAL INFORMATION




New Tool

Models No. ▶ HR2400

Description ▶ 24 mm (15/16") Rotary Hammer

CONCEPTION AND MAIN APPLICATIONS

Compact, lightweight but powerful rotary hammer with three action modes.

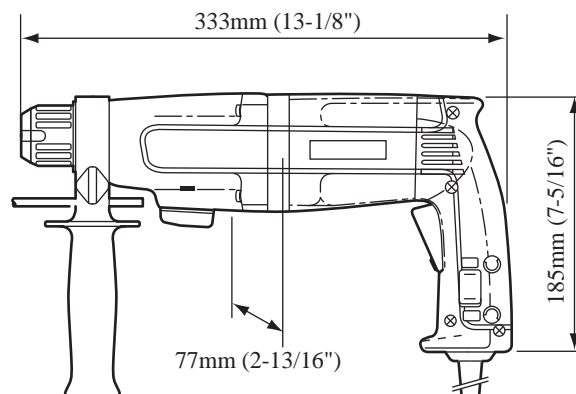

► Specifications

Voltage (V)	Current (A)	Cycle (Hz)	Continuous Rating (W)		Max. Output(W)
			Input	Output	
100	7.0	50/60	660	300	550
115	6.0	50/60	660	280	550
200	4.0	50/60	750	330	550
220	3.6	50/60	750	330	550
230	3.4	50/60	750	330	550
240	3.3	50/60	750	330	550

No Load Speed		0- 1,200 R/min
Blows per Minute		0- 4,200
Capacities	Concrete	24mm (15/16")
	Steel	13mm (1/2")
	Wood	24mm (15/16") for ship auger bits
		38mm (1-1/2") for spade bits
Net Weight		2.4kg (5.3lbs)

► Standard equipment

Depth Gauge, Grip, Steel Carrying Case

► Optional accessories

Various sizes of Tungsten-carbide Bits, Drill Chuck Assembly, Chuck Key, Holder Driver, Chisel Adapter, Bull - Point, Cold Chisel, Anchor Setting Tool, Taper Shank Adapter, Cotter, Bit Grease, Blow-out Bulb, Dust Cup, Dust Extractor Attachment

► Features and benefits

1. Double insulated for operator safety
2. Less reaction and faster drilling thanks to new hammering mechanism
3. Accepts Makita genuine bits, SDS Plus bits and Hilti bits.
4. Can be connected to Makita Dust Collector (Models 420 and 420S) or Makita Vacuum Cleaner (Models 402, 405, etc.) using a dust extractor attachment (optional accessory). So clean and dustless operation can be performed.
5. Grease pack lubrication system: no more messy oiling
6. Chisel adapter (optional accessory) allows use of bull point and cold chisel.
7. See the attached sheet for more information.

The standard equipment for the tools shown may differ from country to country

