

T ECHNICAL INFORMATION




Models No. ▶ HR2410

Description ▶ 24 mm (15/16") Rotary Hammer

CONCEPTION AND MAIN APPLICATIONS

Well balanced, lightweight rotary hammer with 2-mode switching mechanism for drilling only or hammer drilling. This rotary hammer is designed mainly to drill holes 12mm(15/32") and 14.5mm(9/16") in diameter for anchor bolts in concrete.

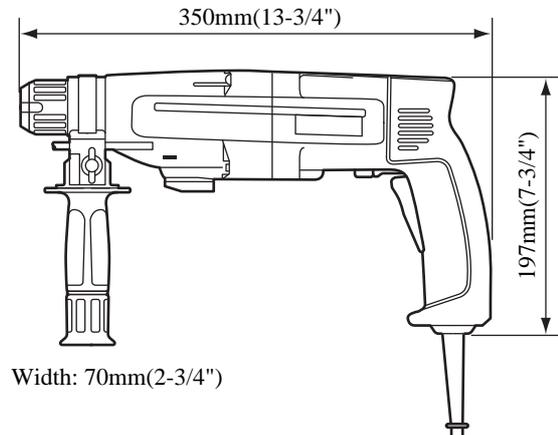

► Specifications

Voltage (V)	Current (A)	Cycle (Hz)	Continuous Rating (W)		Max. Output(W)
			Input	Output	
100	6.5	50/60	620	210	580
115	6.2	50/60	680	250	580
200	3.6	50/60	680	250	580
220	3.3	50/60	680	250	580
230	3.1	50/60	680	250	580
240	3.0	50/60	680	250	580

Capacities	Concrete	24mm(15/16")
	Steel	13mm(1/2")
	Wood	32mm(1-1/4")
No load speed		0-1,050R/min.
Blows per minute		0-4,900
Net weight		2.3Kg(5.1 lbs)

► Standard equipment

Depth Gauge, Side Grip, Plastic Carrying Case

► Optional accessories

Various Sizes of Tungsten-carbide Tipped Bits, Drill Chuck assembly, Chuck Key, Holder Driver, Taper Shank Adapter, Cotter, Bit Grease, Blow-out Bulb, Dust Cup, Dust Extractor Attachment

► Features and benefits

1. Double insulated
2. Optional dust extractor attachment can be installed.
3. Refer to the attached sheet for more information.

