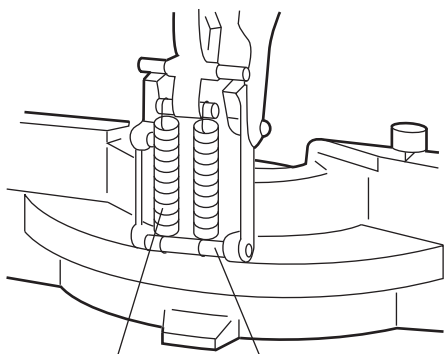
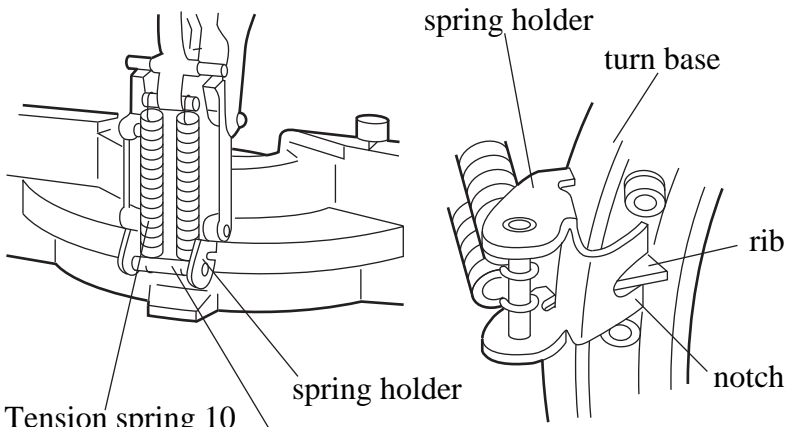


Subject ▶ Change on Tension Spring

For Models ▶ LS0810

Description ▶ Tension-springs connecting the base and the motor-part have been changed to stronger ones , so that the motor-part can be returned to the original position fully.

▶ Current	▶ New
 <p>Tension spring 9</p> <p>Spring pin 6-55</p>	 <p>Tension spring 10</p> <p>Spring pin 6-40</p> <p>*Spring Holder is to be set as illustrated above:</p>

Interchangeability(I/C)

Item No.	Current part		Q'ty	I/C	New part	Q'ty		Note
59	Tension spring 9 231771-0		2	No	Tension spring 10 231815-6	2		Interchangeable as a set ↑ ↓
97					Spring Holder 344631-8	1		
63	Spring pin 6-55 951234-7		1	=>	Spring pin 6-40 951225-8	1		

Note

Interchangeability mark:=>means that the current can be substituted for the new.

Implementation

From serial No. 36370E (Aug., 1997)