


For Models ▶ ML180

Description ▶ Rechargeable Torch

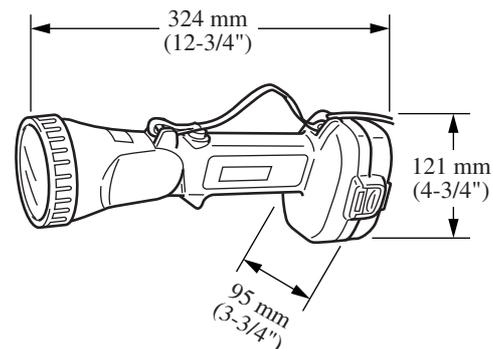

CONCEPTION AND MAIN APPLICATIONS

Model ML180 is the sister version of the existing Model ML120 and ML140.

Model ML180 is powered by 18V Batteries, which are Battery 1822 and 1833.

► Specifications

		ML180
Voltage		DC18V
Current		0.6A
Net. Weight (Without Battery)		0.29kg(0.631bs)
Continous lighting time	2.0Ah Battery	180min.
	2.2Ah Battery	200min.
Bulb		18V, 0.6A
Bulb life		50hr or more

► Standard equipment

Strap...1

Bulb...2(1:on tool, 1:for replacement)

(Note) The standard equipment may differ from country to country.

► Optional accesories

Bulb set

Battery 1822(Ni-Cd)




Battery 1833(Ni-MH)

Battery Charger DC1801


► Features and benefits

See the sheets attached for more information.


ML180

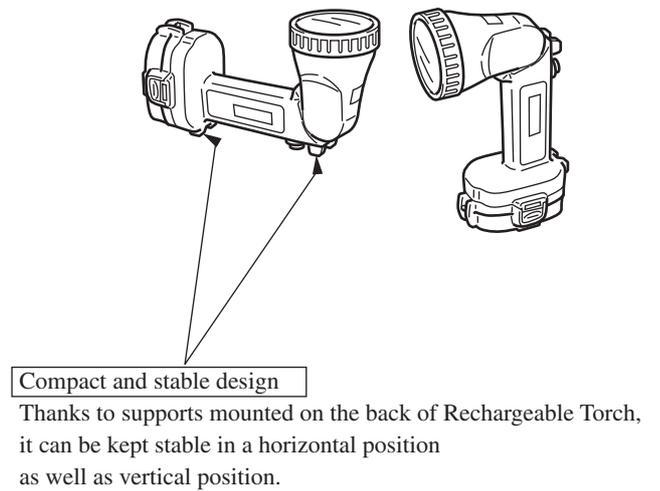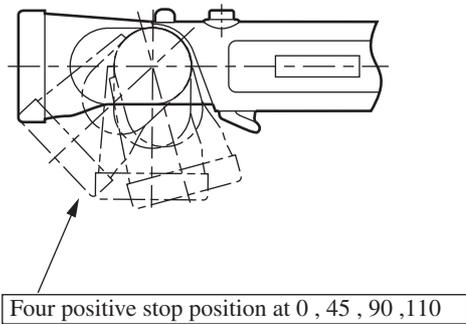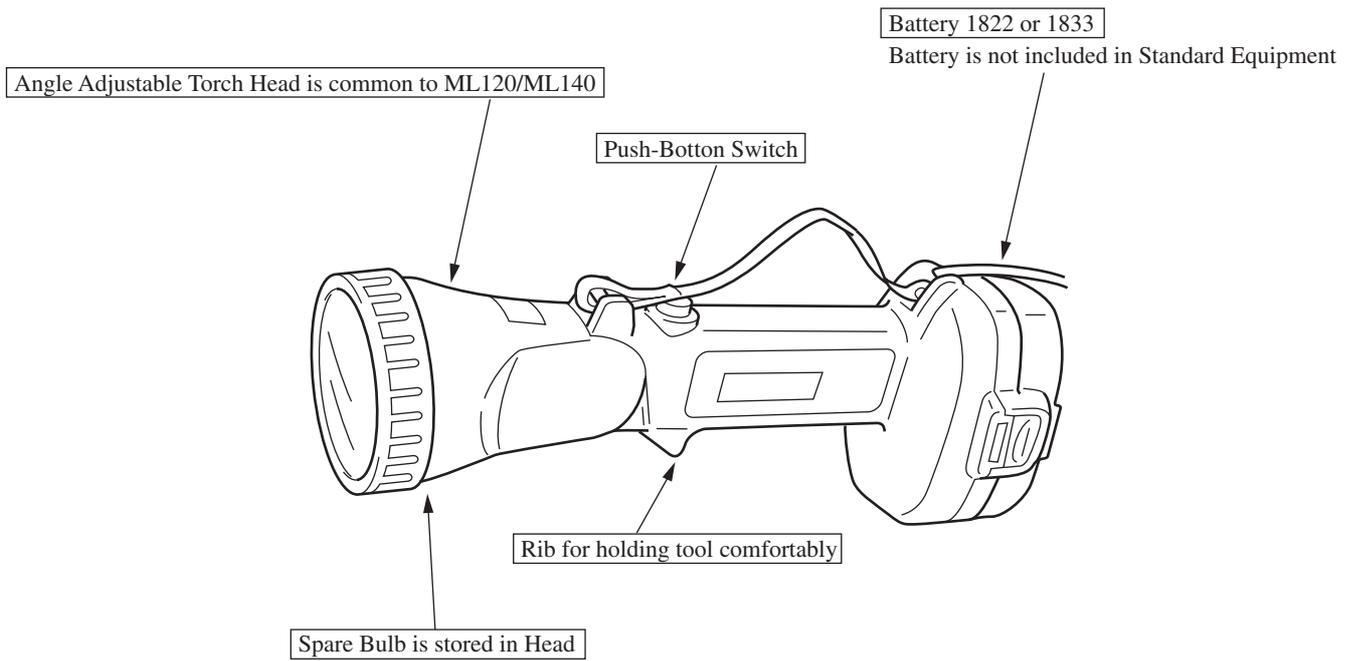

▶ Wiring diagram

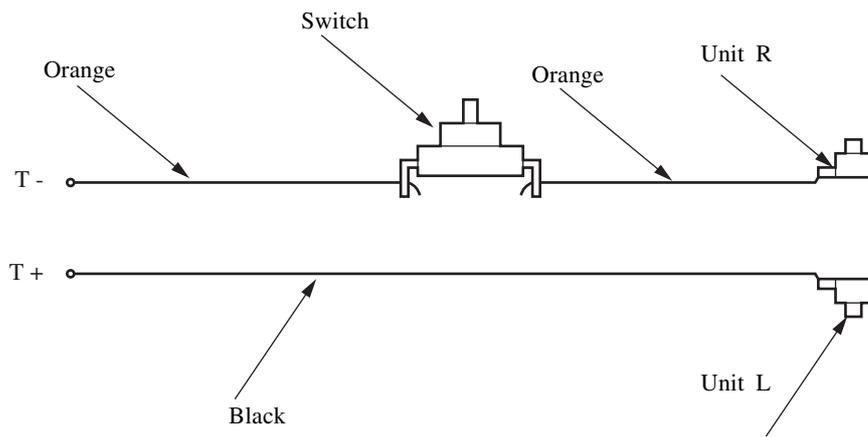

▶ Wiring

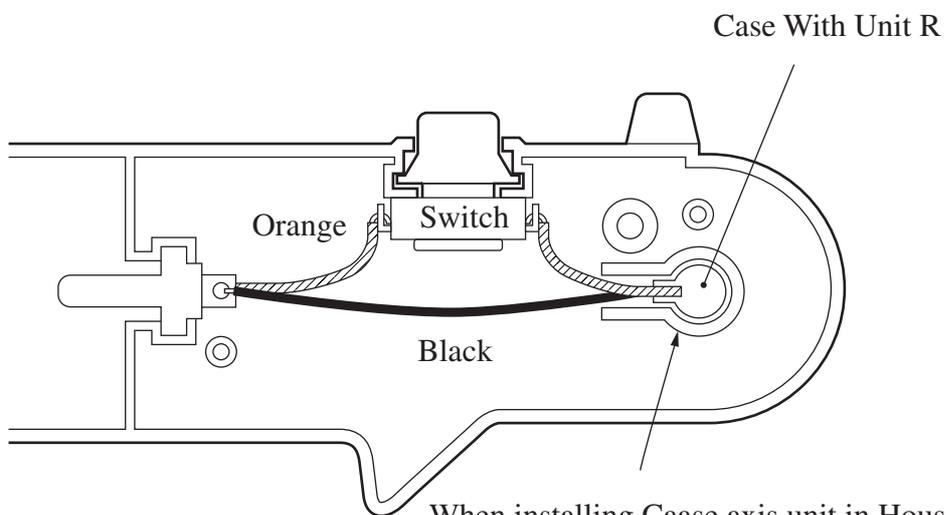

When installing Case axis unit in Housing L side,
be sure to put Case axis unit R
(Orange lead wire side) in upper position.