

# T ECHNICAL INFORMATION



New Tool

**Models No.** ▶ 9035D

**Description** ▶ Cordless Sander

## CONCEPT AND MAIN APPLICATIONS

Model 9035D/9035DW are compact,  
light yet powerful battery sanders.  
No other competitor has similar products.


9035DW consists of :

9035D (Battery sander)

DC7000 (Quick charger)

Battery 7000

Battery is not attached to 9035D.

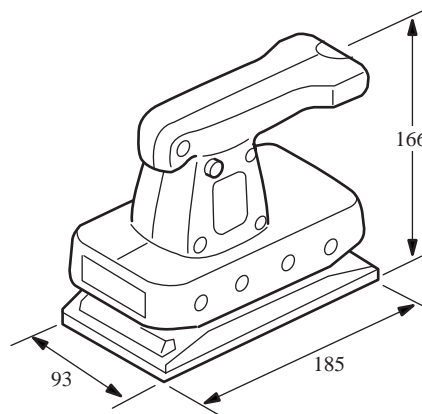

### ► Specifications

<b>Motor</b>	DC 7.2 V magnet motor
<b>No load speed</b>	6000/min.
<b>Paper size</b>	93 x 228 mm
<b>Pad size</b>	93 x 185mm
<b>Weight</b>	1.3 kg(Battery included)

### ► Standard equipment

Sanding paper 93-60 2 sheets

Sanding paper 93-100 2 sheets

Sanding paper 93-150 2 sheets

### ► Optional accessories

Sanding paper 93-60

Sanding paper 93-100

Sanding paper 93-150

Battery 7000

### ► Features and benefits

1. Cartridge-type battery is adopted. (Spare battery allows you to work twice as much.)
2. You can operate it by single hand, and its switch operation is easy..
3. You can operate it for about 15 minutes per charge (for about 1 hour).
4. No wind from the fan stirs up wood dust.
5. Gear shift speed control promises you powerful operation.


### ► Capacity

The same as 9035SB.

## ► Repair

### 1. Direction of balancer fixed

Fix the balancer, as shown in the figure, against the eccentric direction in the axial center of the spindle end.

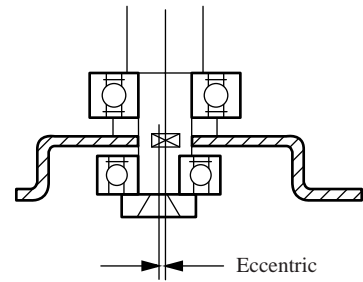

### 2. Attachment of push rod

Insert the push rod into the switch hole after the housing has been assembled.