

T ECHNICAL INFORMATION



New Tool


Models No. ▶ DC9700

Description ▶ MAKITA Battery charger

CONCEPTION AND MAIN APPLICATIONS

You can charge Battery 7000, Battery 9000 and Battery 9100 in a high speed--for an hour--by this one machine.

The color of Housing is black to distinguish from #DC9100.

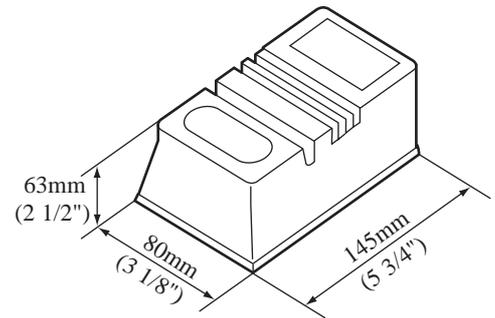

► Specifications

Voltage(V)	Current(A)	Frequency(Hz)	Consumed power(W)	Rated output(W)	Max. output(W)
100	-	50-60	3.5 VA	-	-
115	-	50-60	35W	-	-
220	-	50-60	35W	-	-
240	-	50-60	35W	-	-

Output Voltage(V)	Direct current 7.2V Direct current 9.6V	
Output current(A)	For domestic	Direct current 1.5A
	For export	Direct current 1.2A
Charging time(hour)	1	
Weight(kg)(lbs)	0.8kg(1.8lbs)	
Cord length(m)(ft)	2m(6.6ft)	

► Standard equipment

None

► Optional accessories

None

► Features and benefits

- 1.You can charge Battery7000, battery 9000 and Battery 9100 very quickly in one hour.
- 2.How to use is the same as #DC9100, for it is changed automatically from 7.2 V to 9.6V by the change lever hour very quickly.

► Repair

Check if the change lever moves or not after disassembly and assembly.

The standard equipment for the tools shown may differ from country to country.