

T ECHNICAL INFORMATION




New Tool

Models No. ▶ HP2030

Description ▶ 20 mm(3/4") 2-Speed Hammer Drill

CONCEPTION AND MAIN APPLICATIONS

Model HP2030 is variable 2-speed professional hammer drill with reversing feature and powerful, fast masonry drilling capacity. It has impact-resistant handle with built-in rubber cushion.

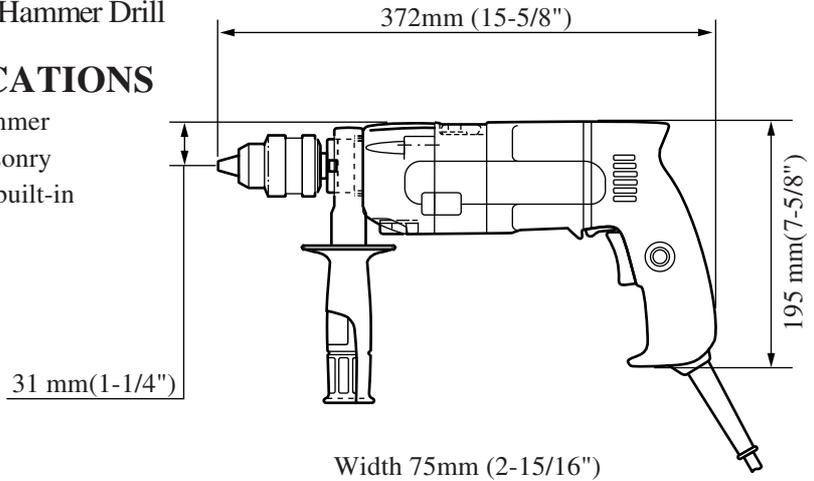

► Specifications

Voltage (V)	Current (A)	Cycle (Hz)	Continuous Rating (W)		Max. Output(W)
			Input	Output	
100	7.5	50/60	710	330	620
115	6.5	50/60	710	330	620
200	3.8	50/60	710	330	620
220	3.4	50/60	710	330	620
230	3.2	50/60	710	330	620
240	3.1	50/60	710	330	620

Max. capacities	Concrete	Hi: 13mm (1/2")	Lo: 20mm (3/4")
	Steel	Hi: 8mm (5/16")	Lo: 13mm (1/2")
	Wood	Hi: 25mm (1")	Lo: 40mm(1-9/16")
No load speed		Hi: 0 - 2,900	Lo: 0 - 850
Blows per minute		Hi: 0 - 32,000	Lo: 0 - 9,400
Net Weight		2.4kg (5.3 lbs)	
Power supply cord		2.5m (8.2ft)	

► Standard equipment

Drill chuck S13, Chuck key S13, Key holder 12, Depth rod, Plastic carrying case

► Optional accessories

Various sizes of tungsten-carbide tipped bit, Hole saw 79, 95, Blow-out bulb

► Features and benefits

1. Double insulated
2. For further information, see information sheet which we will send you later.

The standard equipment for the tools shown may differ form country to country

This is additional information on Model HP2030 (2-3Speed Hammer Drill).
Attach this information sheet to MAKIT NEW TOOL INTRODUCTION NT-30/94.

