


For Models ▶ 6905H

Description ▶ Impact Wrench

CONCEPTION AND MAIN APPLICATIONS

Priced much lower than the existing Model 6905B, yet its capacities and functions are the same as the Model 6905B. Incredible light (2.3kg ; 5.1 lbs) and well-balanced for an impact wrench of this power.

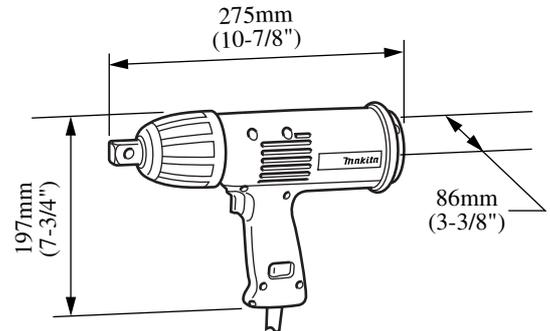

► Specifications

Voltage(V)	Current(A)	Cycle(Hz)	Continuous Rating(W)		Max. Output(W)
			Input	Output	
100	4.9	50/60	470	200	340
115	4.3	50/60	470	200	340
200	2.5	50/60	470	200	340
220	2.2	50/60	470	200	340
230	2.1	50/60	470	200	340
240	2.0	50/60	470	200	340

► Capacity

Standard bolt : M12-M20(7/16"-3/4")

High tensile bolt : M12-M16(7/16"-5/8")

Square Drive : 12.7mm(1/2")

No load speed : 2,200R/min

Impacts per min : 2,600

Max.Fastening Torque : 3,000kg.cm(217ft.lbs)

Net weight : 2.3kg(5.1 lbs)

► Standard equipment

Socket 19-40, 22-42, 24-43.5, Steel Carrying Case

► Optional accessories

Various size of Sockets, Extension Bar 12.7, Universal Joint 12.7, Oval Socket, Time Switch

► Features and benefits

1. Very lightweight (2.3kg ; 5.1lbs) and well-balanced as this impact wrench employs clamshell type of plastic housings.
2. Double insulated for operator safety
3. Comes with steel carrying case
4. Reversing feature
5. Rubber bumper in front
6. Powerful 470-watt Makita motor